

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

BOQ for the Furnishing works to be Carried out at New Regional office of Canara Bank at CBD Belapur.

Points to be remembered before quoting the price .

This is one of the very important project and maintaining the periodic completion of works is the main task of the Vendor.

The vendors is required to submit and understand the following details before quoting the rates/Amount.

1. The vendor will have to submit the PERT Chart for the completion of the wks and t it approved by the appointed Architect /consultant company.
2. The weekly report of the on going works submission is required to be submitted along with the design/drawings and the relevant site photographs.
3. The weekly report of the of works which will be completed as per PERT Chart is to be submitted in advance during the works execution stage.
4. The vendor has to get written authentication for the samples set of materials to be used in the project .He has also to provide an endorsed letter regarding the owe for using these checked materials in the project .
5. The vendor has to provide the samples set by signing them in presence of the Architect/Consultant/ or their appointed site Incharge for the Lab test of the materials, whenever required to do so by the consultant during the works execution stage. These samples are to be submitted along with the endorsed letter providing the relevance of the material and the purchase bill of the material used in the project.
6. The amount of the Lab test will be paid or reimbursed by the execution agency to the Architect/consultant on their producing the required documents to prove that the Architect/consultant have paid the claimed amount against the Lab test. These test will be conducted in NABL Accredited renowned laboratories.
7. The vendors are required to Physically visit the site so that they are acquainted with the true knowledge of the site, in practical.
8. The time mentioned in the relevant tender is the essence of this project therefore the project is to be carried out within the specified time limits.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

<p>Important points regarding using of Materials, working at site, Mock ups etc. - The vendors must know following points to understand the material usage, working at site etc. Some of the very important points which have a direct or indirect effect on the price quote and therefore mandatory to be learnt understood are as follows -</p> <ol style="list-style-type: none"> 1. The mentioned make or brand is to be used in the works. The material used should confirm the relevant IS , ISO or any subsequent code the material is registered , as per the law of land. 2. The works are to be carried as per the latest NBC Code and IE, rules. 3. Where the mentioned make is unavailable the vendor have right to notify in writing and get the sanction of the equivalent make. This will be applicable only in case of written consent by the appointed Banks Engineer / Architect/ Consultant. 4. The furnishing vendor will be required to draw a line layout , at the site and get it checked prior to the commencement of the works. He will also be required to get all the mock up of the furniture to be checked and approved by the appointed Architect/ Consultant. All these approvals are to be taken by the vendor in writing. 5. The vendors are to get their staff persons or their works men, whoever they are, to be insured as per the relevant code of Labor insurance, applicable on the very date of tendering or quoting the relevant works. 6. The items raet are inclusive of supplying, installation and perfect commissioning of the provided modules. The written letter or the consent of the Banks appointed Engineer incharge/ Consultant/ Architect will only confirm the completion of the works as per the standard BOQ and the works done in accordance to the mentioned tender. 7. The quoaated rates are for standard working of he module till the defect lablity period. Nothing extra will be paid against any claims other than those quoted in the relevant BOQ, for the works completion.
<p align="center">INTERIOR FURNISHING WORKS</p>
<p align="center">Estimated Cost of important naterials to be used in this Project.</p>

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

	<p>Basic cost of some of the important materials but strictly as per relevant IS/ISO Code, to be used in this project</p> <ol style="list-style-type: none"> 1. 18 mm thick Ply of approved make and confirming to ISO Standard of MR Grade, basic cost @ 82/ Sq.ft. 2. MR Grade 12 mm Ply, basic cost @ 52/ Sq.ft. , 3. MR Grade 6 mm Ply, basic cost @ 38/ Sq.ft. 4. Flexi Ply 6mm thick basic cost @ 80/ Sq. ft approved laminate of approved color /shade basic Cost @ 45/Sq.ft. while the internal surfaces will be finished by using 5. 0.8mm thick laminate , basic cost @ 30/Sq. ft. Edge bending tape of matching color and shade. 6. 1.00 mm thick Laminate , basic cost 52/sqft. 7. Half molded Granite/ Italian or Corian basic cost @ 375/ Sq.ft. Wiper Paint, approved Primer, Velvet Touch paint basic cost @ 45/Sq.ft., Royal Play Paint basic cost @ 75/Sq.ft. Velvet cloth basic rate @ 350/Sq.mtr. 8. Marine grade adhesive, 9. Imported Wall papers basic cost @ 45/Sq. ft. 10. Hardware's of a reputed make of SS 304 Grade of approved Finish. 11. Plain glass 6mm,10mm & 12mm. Toughened glass 8mm, 10mm & 12mm. 12. Aluminium Sections - Polyester Powder Coated (50 Microns, of required color & texture), Box section 50 x 50 mm, 50 x 25 mm, 25x25 mm & 2 1/2 x 1 1/2 Aluminium section), 13. Glass door Aluminium section. All the Hardware's used in Aluminium works to be polyester powder coated in the desired shade & color as approved by the consultant. Teak wood sections of 50mm x 25 mm, 14. Wooden Beadings & Moldings of Steam beach are used. Melamine Polish on the wooden item. 15. Gypsum Board basic cost @ 20/Sq.ft. 16. Grid tiles basic cost @ 110/Sq.ft.
	<p>Note - The measurements as per standard practices / as per IS Code will be followed. In Partitions and ceilings he measurements of the linear length of the finished commodity used for the frame will govern the area measurements of the works.</p>

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

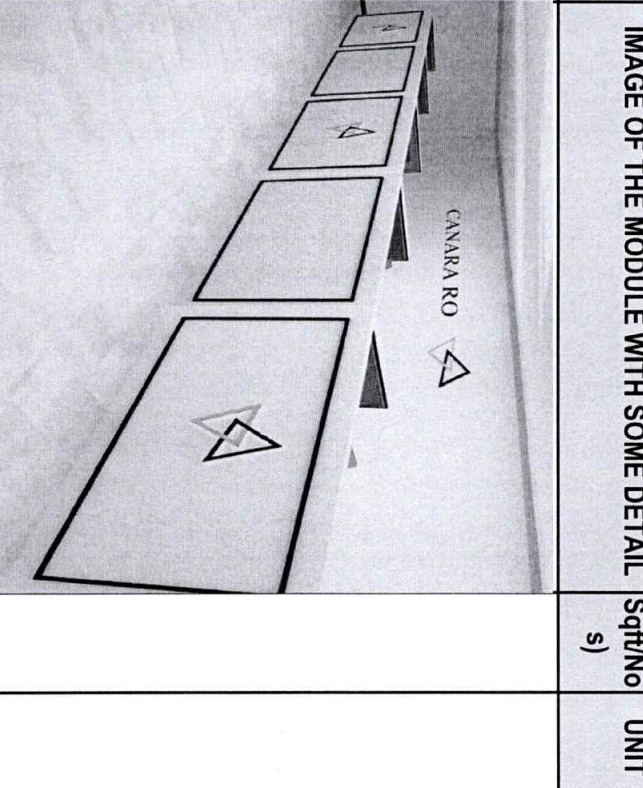
In case of Unjustified abnormal very low quotes - As the project is estimated on the basis of the market rates and the relevant DSR / SSR rates where the profit percentage is assumed to be of 15% on the total amount of expenses incurred. Hence if the vendor quotes below 15% of the estimated project cost than he will not only have to submit rate analysis against the quoted rates but also will have to pay 10% performance warranty issued from the nationalized Bank in favor of the Project owner/ organisation. This will ensure the warranty of the performance on the quoted lower rates. The performance warranty will be returned after the successful completion of the project. However in case of failure or caught in malafide intention against the stipulated norms of the project this performance warranty will be automatically withheld by the client/Owner.

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
1	LOW HEIGHT PARTITIONS - POSITIONED IN FRONT OF WORKING COUNTER	PM1 V1 ,V2,V3 & PM4.These PARTITION WITH NITCH AND LED STRIP LIGHT IN PASSAGE IN FRONT OF CUBICALS	833.8	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
A	<p>The Low height partitions having height of 1575 mm from the floor level with a thickness of 150 mm are to be primarily made using 25 mm thick MR Grade Ply. The bottom of these partitions will rest on the 16 Gauge, 50x50 mm, 50 Micron Anodised Aluminum box section covered by a 25mm thick BWR Grade Ply forming a box shape around this skeleton of the Aluminum frame. The thickness of this base on which the vertical MR ply of 25 mm will rest will be of 75 mm. The inner side of the Partition will have a tier at an height of 1075 mm which will protrude about 100 mm from the vertical Ply of 25 mm, as shown in the design/drawing. This protruded section will have 2 track channel SS 302 Grade Channel with a 6 mm toughened glass running on it across the length of the interior part of the finished Partition. The inner part of this partition from the height of 1075 mm till the height of 1475 will have a Pin board made on it by using approved Scotch guard velvet cloth on it. The entire exposed Area of this Partition framed by 25 mm ply will be covered from both side by using 1.5 MM thick</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

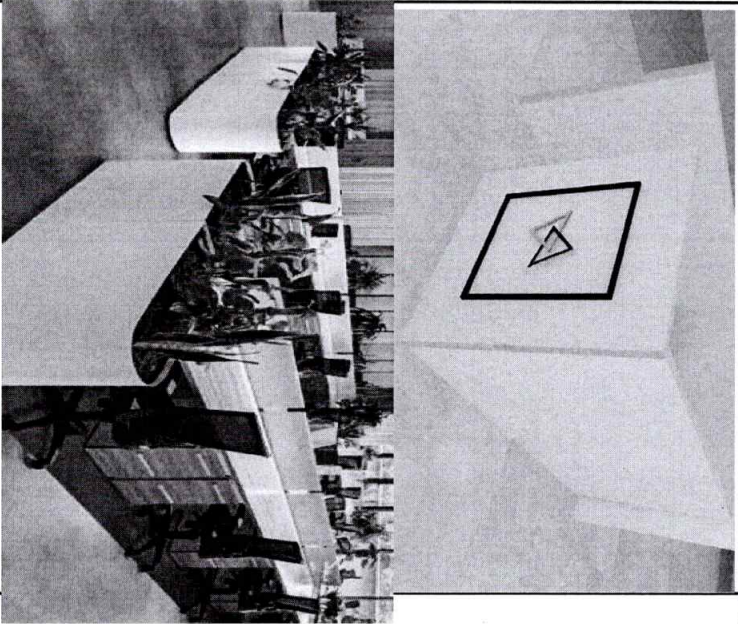
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqr/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>Laminate of Approved Color/Shade. Providing of the Logo of the Canara Bank of approx. size of 300 mm made up of Acrylic sheet of 0.4 mm thick and to be affixed on these partitions, is in the scope of works. The provision of the entire wiring for Power Points, light, Data cable, are the essentials of the works. The entire commodity is to be made only after authentic concurrence of the approval of the sample, only. The entire works to be done as per the standard procedure and ready to conditions. The payments will be released after the release of satisfaction letter issued at various stages of works and this commodity by the appointed Architect/ Consultant in concurrence to the Banks Department or the relevant Tender.</p>					
B	LOW HEIGHT PARTITIONS - POSITIONED AT SIDES AND BACK OF CUBICALS	<p>PM2 PM3 PARTITION 3" X 5' (PM2 WITH OUT LOGO AND PM3 WITH LOGO) PARTITION IN BACK & SIDES OF CABIN DESK WEHRE THERE IS NO SIDE WISE SITTING, WITH 1" BLUE STRIP</p>	659.6	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

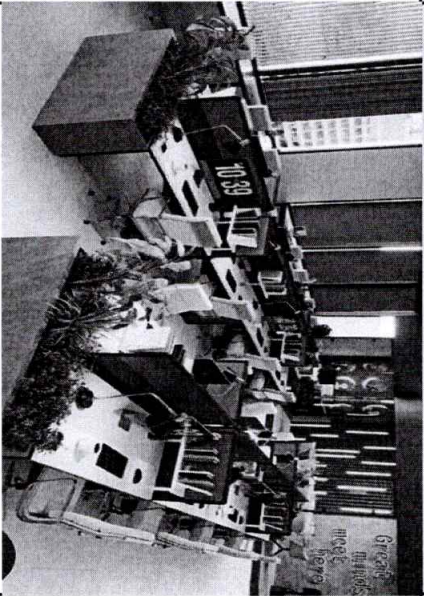
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The Low height partitions having height of 1575 mm from the floor level with a thickness of 75 mm are to be primarily made using 25 mm thick MR Grade Ply. The bottom of these partitions will rest on the 16 Gauge, 50 Micron Anodized 50 x 50mm thick Aluminum Section. This section covered by a BWR Grade Ply forming a box shape around this skeleton of the Aluminum frame. The thickness of this base on which the vertical MR ply of 25 mm will rest will be of 75 mm. The inner side of the Partition will have a tier at an height of @ approx. distance of 425 mm which will protrude about 50 mm from the vertical Ply of 25 mm, as shown in the design/drawing. This protruded section will have small balusters of 100 mm length and 40 mm width fitted with 25 mm rails made of SS 302 Grade Channel. The interior part of this exposed ply will be covered by using Textured Laminate, basic cost @ 100 per Sq.ft, of approved color and shade. This internal part will have a provision of cove light also. Rest of all this Partition framed by 25 mm ply will be covered from by using 1.5 MM thick Laminate of Approved Color/Shade. Providing of the Logo of the Canara Bank of approx. size of 300 mm made up of Acrylic sheet of 0.4 mm thick and to be affixed on these partitions, is in the scope of works.</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

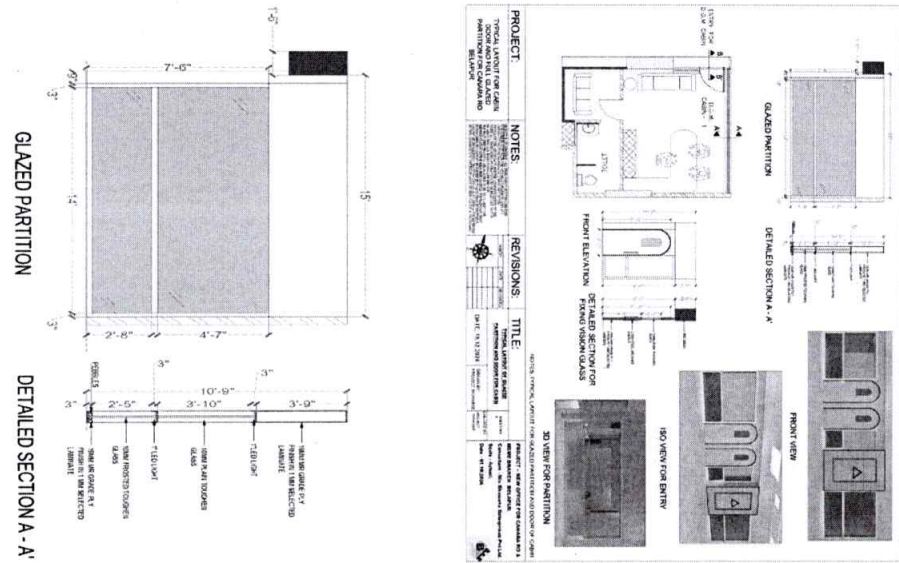
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The provision of the entire wiring in this module by making a cable tray using 0.5 mm thick Acrylic sheet and trespassing the cables, wires required for Power Points, light, Data cable, are the essentials of the works. The entire commodity is to be made only after authentic concurrence of the approval of the sample. only. Artificial and natural money planners, Pebble stones and black soil, or as approved @ 75/ sqft. as a basic cost are to be added for providing these designs and planters in the low height partitions. The entire works to be done as per the standard procedure and ready to use conditions. The payments will be released after the release of satisfaction letter issued at various stages of works and this commodity by the appointed Architect/ Consultant in concurrence to the Banks Department or the relevant Tender</p>					
C	<p>Providing and fixing of 6mm Toughened Glass Partition with the help of SS Glass CATCHERS of approved design and make made up of SS 304 Grade</p>	<p align="center">MODULE GP1</p>	30	SQFT		
2	<p>FULL GLAZED PARTITION NEAR CABIN</p>	<p>FG1, FG2 & FG3. & ENTRANCES OF RO, MSME, etc.</p>	390	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

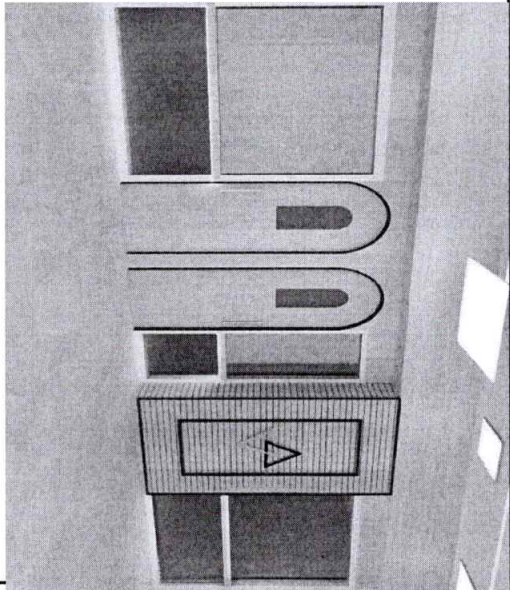
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	QNTY (Sqft/No s)	UNIT	Rate/Un it AMOUNT (In Rs)
A	<p>These Partitions are to be made by using 16 gauge , 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false ceiling sectionsThese partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm. The framed structure wherever required will be covered by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. These box like framing to be provided at thr bottom & at the preferably at bottom and top of ventilator Positions, also. The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical directions: 10 mm thick Toughened Glass without any joints along the length will be fitted with the help of Glass catchers of approved design and make on this box sections. The partial part of these frames will be etched or frosted as per the design/drawing shown or provided. The entire exposed part of the 9mm Ply used for sandwiching the frame of this commodity will be covered by 1.5 mm thick approved color and shade, These Partitions will have</p>			

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqt/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>Toughened Glass door of 10 mm thickness running on Pivot Door section with Patch fitting, having large door Machine with all the required Hardwares and Hadles of 450 mm. The provision of the entire wiring in this module by making a cable tray using 0.5 mm thick Acrylic sheet and trespassing the cables , wires required for Power Points, light, Data cable, are the essentials of the works. The entire commodity is to be made only after authentic concurrence of the approval of the sample, only. The entire works to be done as per the standard procedure and ready to use conditions. The payments will be released after the release of satisfaction letter issued at various stages of works and this commodity by the appointed Architect/ Consultant in concurrence to the Banks Department or the relevant Tender</p>					
3	SOLID PARTITION	SPM1, SPM2, SPM3-----16	3000	SQFT		
A	IN RECEPTION AREA TOWARDS PASSAGE FOR RO					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Un it	AMOUNT (In Rs)
	<p>These Partitions are to be made by using 16 gauge , 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false ceiling sections These partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm. at the bottom and top and both the rear sides. The other Part inside this border of 150 mm width, is to have a thickness of 75 in vertical form. The framed structure wherever required will be covered by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. This box like framing to be provided at thr bottom & preferably at bottom and top of ventilator Position. The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical directions. 10 mm thick Toughened Glass of the required size to be placed with the support of Glass catchers of approved design (450 mm x 450 mm at least 2 tier on each sides to serve as a glass stand for keeping planters etc. .</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

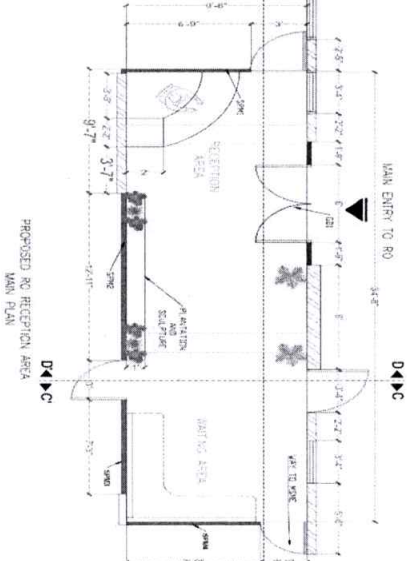
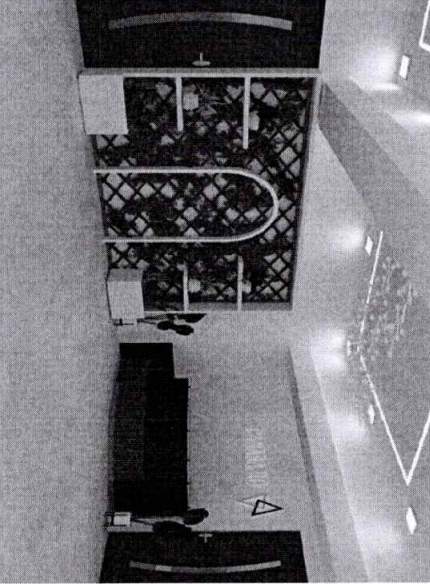
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The entire commodity to be completed as a one, complete part. , The Area of this Plain toughened glass will be 15 Sq.ft to 18 Sq.ft for one single complete solid partition. The name plate with the designation made by on 0.5 Acrylic Sheet as per design module is the part of the works. These Partitions will have Toughened Glass door of 10 mm thickness running on Pivot Door section having large door Machine.with all the required Hardwares and Hadles of 450 mm. The entire exposed part of this framed solid partition to be sandwiched by using of the 9mm MR Grade Ply used for sandwiching which will be further covered by 1.5 mm thick laminate of approved color and shade Trespassing of the electrical wires, procuring Planters (Basic rate @5500 for One Glass stand x 4nos as approved by the appointed Architect /consultant of the Bank are the parts of the works. The entire works are to be quoted for ready to use condition without asking any extra payments on account of any left out details but required for the completion of the works.</p>					
B	PARTITION NEAR WC					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects,Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	QNTY (Sqft/No s)	UNIT	Rate/Unit AMOUNT (In Rs)
	<p>This Partitions are to be made by using 16 gauge , 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false ceiling sections These partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm.at the bottom and top and both the rear sides. The other Part inside this border of 150 mm width is to have a thickness of 75 in vertical form. The framed structure wherever required will be covered by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. These box like framing to be provided at thr bottom & at the preferably at bottom and top of ventilator Position, also. The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical directions. . The Area of this Plain toughened glass will be 15 Sq.ft to 18 Sq.ft for one single complete solid partition. The name plate with the designation made by on 0.5 Acrylic Sheet as per design module is the part of the works.</p>			
				
				

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

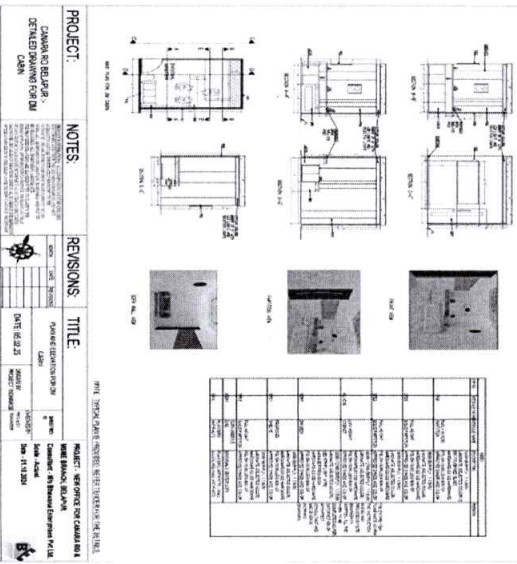
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The entire commodity to be completed as a one part. The entire exposed part of this framed solid partition to be sandwiched by using of the 9mm MR Grade Ply used for sandwiching which will be further covered by 1.5 mm thick textured laminate (basic cost @ 140/s)Sqft of approved color and shade. The provision of 32 mm thick BWR Grade door forming a framing by using 25mm BWR Ply having a Vision panel made up of toughened glass (675 mmX 450 mm) along with all the required accessories such as large Door Machine, 450 mm Large SS Handle, latches, door stopper etc. are the part of this works.Procuring all the required hardwires of SS 302 Grade of approved shape and size, quality and then fixing it are the scope of this works. . The entire works are to be quoted for ready to use condition without asking any extra payments on account of any left out details but required for the completion of the works.</p>					
C	SOLID PARTITION OF DGM & AGM CABINS					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

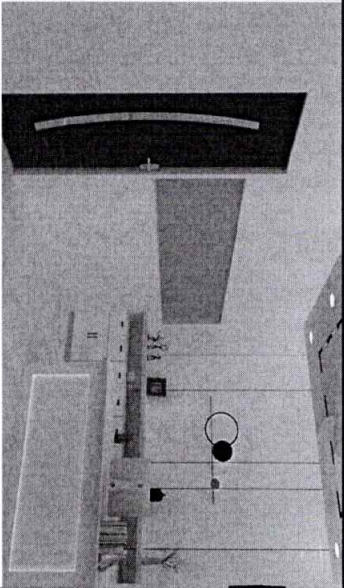
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)																																																																																																																																																																																																																																																																																																																		
	<p>This Partitions are to be made by using 16 gauge, 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false ceiling sections. These partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm. at the bottom and top and both the rear sides. The other Part inside this border of 150 mm width is to have a thickness of 75 in vertical form. The framed structure wherever required will be covered by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. These box like framing to be provided at thr bottom & at the preferably at bottom and top of ventilator Position, also. The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical directions. The entire commodity to be completed as a one part. The Area of this Plain toughened glass will be 15 Sq.ft to 18 Sq.ft for one single complete solid partition. The name plate with the designation made by on 0.5 Acrylic Sheet as per design module is the part of the works.</p>	 <table border="1" data-bbox="941 1411 1220 1579"> <thead> <tr> <th>NO.</th> <th>DESCRIPTION</th> <th>UNIT</th> <th>QTY</th> <th>PRICE</th> <th>TOTAL</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ALUMINUM SECTION</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>2</td> <td>MR GRADE PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>3</td> <td>PLAIN TOUGHENED GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>4</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>5</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>6</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>7</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>8</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>9</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>10</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>11</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>12</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>13</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>14</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>15</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>16</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>17</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>18</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>19</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>20</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>21</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>22</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>23</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>24</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>25</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>26</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>27</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>28</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>29</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>30</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>31</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>32</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>33</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>34</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>35</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>36</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>37</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>38</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>39</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>40</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>41</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>42</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>43</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> <tr> <td>44</td> <td>GLASS</td> <td>SQ. FT.</td> <td>15</td> <td>120</td> <td>1800</td> </tr> <tr> <td>45</td> <td>PLY</td> <td>SQ. FT.</td> <td>18</td> <td>50</td> <td>900</td> </tr> <tr> <td>46</td> <td>ACRYLIC SHEET</td> <td>SQ. FT.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>47</td> <td>VENTILATOR</td> <td>NO.</td> <td>1</td> <td>1000</td> <td>1000</td> </tr> <tr> <td>48</td> <td>COVE LIGHT</td> <td>NO.</td> <td>1</td> <td>500</td> <td>500</td> </tr> <tr> <td>49</td> <td>NAME PLATE</td> <td>NO.</td> <td>1</td> <td>100</td> <td>100</td> </tr> <tr> <td>50</td> <td>FRAMING</td> <td>SQ. FT.</td> <td>15</td> <td>100</td> <td>1500</td> </tr> </tbody> </table>	NO.	DESCRIPTION	UNIT	QTY	PRICE	TOTAL	1	ALUMINUM SECTION	SQ. FT.	15	100	1500	2	MR GRADE PLY	SQ. FT.	18	50	900	3	PLAIN TOUGHENED GLASS	SQ. FT.	15	120	1800	4	ACRYLIC SHEET	SQ. FT.	1	100	100	5	VENTILATOR	NO.	1	1000	1000	6	COVE LIGHT	NO.	1	500	500	7	NAME PLATE	NO.	1	100	100	8	FRAMING	SQ. FT.	15	100	1500	9	GLASS	SQ. FT.	15	120	1800	10	PLY	SQ. FT.	18	50	900	11	ACRYLIC SHEET	SQ. FT.	1	100	100	12	VENTILATOR	NO.	1	1000	1000	13	COVE LIGHT	NO.	1	500	500	14	NAME PLATE	NO.	1	100	100	15	FRAMING	SQ. FT.	15	100	1500	16	GLASS	SQ. FT.	15	120	1800	17	PLY	SQ. FT.	18	50	900	18	ACRYLIC SHEET	SQ. FT.	1	100	100	19	VENTILATOR	NO.	1	1000	1000	20	COVE LIGHT	NO.	1	500	500	21	NAME PLATE	NO.	1	100	100	22	FRAMING	SQ. FT.	15	100	1500	23	GLASS	SQ. FT.	15	120	1800	24	PLY	SQ. FT.	18	50	900	25	ACRYLIC SHEET	SQ. FT.	1	100	100	26	VENTILATOR	NO.	1	1000	1000	27	COVE LIGHT	NO.	1	500	500	28	NAME PLATE	NO.	1	100	100	29	FRAMING	SQ. FT.	15	100	1500	30	GLASS	SQ. FT.	15	120	1800	31	PLY	SQ. FT.	18	50	900	32	ACRYLIC SHEET	SQ. FT.	1	100	100	33	VENTILATOR	NO.	1	1000	1000	34	COVE LIGHT	NO.	1	500	500	35	NAME PLATE	NO.	1	100	100	36	FRAMING	SQ. FT.	15	100	1500	37	GLASS	SQ. FT.	15	120	1800	38	PLY	SQ. FT.	18	50	900	39	ACRYLIC SHEET	SQ. FT.	1	100	100	40	VENTILATOR	NO.	1	1000	1000	41	COVE LIGHT	NO.	1	500	500	42	NAME PLATE	NO.	1	100	100	43	FRAMING	SQ. FT.	15	100	1500	44	GLASS	SQ. FT.	15	120	1800	45	PLY	SQ. FT.	18	50	900	46	ACRYLIC SHEET	SQ. FT.	1	100	100	47	VENTILATOR	NO.	1	1000	1000	48	COVE LIGHT	NO.	1	500	500	49	NAME PLATE	NO.	1	100	100	50	FRAMING	SQ. FT.	15	100	1500				
NO.	DESCRIPTION	UNIT	QTY	PRICE	TOTAL																																																																																																																																																																																																																																																																																																																			
1	ALUMINUM SECTION	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
2	MR GRADE PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
3	PLAIN TOUGHENED GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
4	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
5	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
6	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
7	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
8	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
9	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
10	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
11	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
12	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
13	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
14	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
15	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
16	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
17	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
18	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
19	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
20	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
21	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
22	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
23	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
24	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
25	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
26	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
27	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
28	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
29	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
30	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
31	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
32	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
33	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
34	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
35	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
36	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
37	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
38	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
39	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
40	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
41	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
42	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
43	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			
44	GLASS	SQ. FT.	15	120	1800																																																																																																																																																																																																																																																																																																																			
45	PLY	SQ. FT.	18	50	900																																																																																																																																																																																																																																																																																																																			
46	ACRYLIC SHEET	SQ. FT.	1	100	100																																																																																																																																																																																																																																																																																																																			
47	VENTILATOR	NO.	1	1000	1000																																																																																																																																																																																																																																																																																																																			
48	COVE LIGHT	NO.	1	500	500																																																																																																																																																																																																																																																																																																																			
49	NAME PLATE	NO.	1	100	100																																																																																																																																																																																																																																																																																																																			
50	FRAMING	SQ. FT.	15	100	1500																																																																																																																																																																																																																																																																																																																			

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

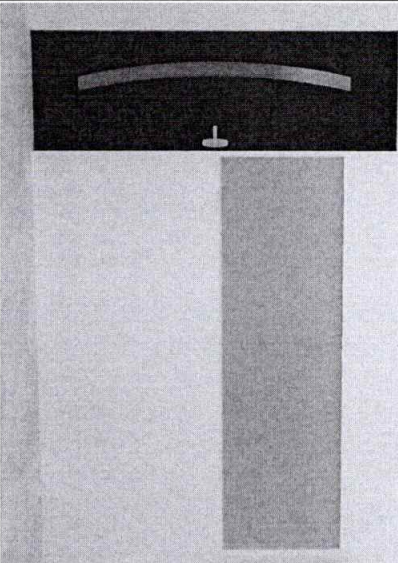
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
D	<p>The entire exposed part of this framed solid partition to be sandwiched by using of the 9mm MR Grade Ply used for sandwiching which will be further covered by 1.5 mm thick textured laminate (basic cost @ 140/s/Sqft of approved color and shade, The Door of 32 mm thick BWR Grade door made by forming a framing by using 25mm thick BWR Ply having a Vision panel made up of toughened glass (450 mmX 450 mm) along with all the required accessories such as large Door Machine, 450 mm Large SS Handle, latches, door stopper etc. are the part of this works. Providing an Acrylic Sheet plate denoting the symbols AND designation, , as per approved design is included in the scope of the works. , thick Ply Trespassing of the electrical wires, procuring and fixing entire approved design and quality of hardwires of SS 302 Grade is the part of the works. The entire works are to be quoted for ready to use condition without asking any extra payments on account of any left out details but required for the completion of the works. The Area of this Plain toughened glass will be 15 Sq.ft to 18 Sq.ft for one single complete solid partition. The name plate with the designation made by on 0.5 Acrylic Sheet as per design module is the part of the works.</p>					
SOLID PARTITION FOR UPS, SERVER,						

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>These Partitions are to be made by using 16 gauge , 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false celeing sections These partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm, at the bottom and top and both the rear sides. The other Part inside this border of 150 mm width is to have a thickness of 75 in vertical form. The framed structure wherever required will be covered by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. These box like framing to be provided at thr bottom & at the preferably at bottom and top of ventilator Position, also. The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical dirrections. The entire commodity to be completed as a one part. The entire exposed part of this framed solid partition to be sandwiched by using of the 9mm MR Grade Ply used for sandwiching which will be further covered by 1.5 mm thick laminate of approved color and shade</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
4	<p>WICKET DOOR</p> <p>These solid partitions are required to have a vision Panel as Per the design provided. This vision Panel will be made by using Plane toughened glass of 10 mm thickness properly fitted in the approved SS-302 Made glass catchers. The Door of 32 mm thick BWR Grade door made by forming a framing by using 25mm thick BWR Ply having a Vision panel made up of toughened glass (450 mmX 450 mm) along with all the required accessories such as large Door Machine, 450 mm Large SS Handle, latches, door stopper etc. are the part of this works. Providing an Acrylic Sheet plate denoting the symbols various rooms as per their usage and as per approved design is included in the scope of the works. Trespassing of the electrical wires, Procuring all the required hardwires of SS 302 Grade of approved shape and size, quality and then fixing it are the scope of this works. . The entire works are to be quoted for ready to use condition without asking any extra payments on account of any left out details but required for the completion of the works. The Area of this Plain toughened glass will be 15 Sq.ft to 18 Sq.ft for one single complete solid partition. The name plate with the designation made by on 0.5 Acrylic Sheet as per design module is the part of the works.</p>	RT1W1	7	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

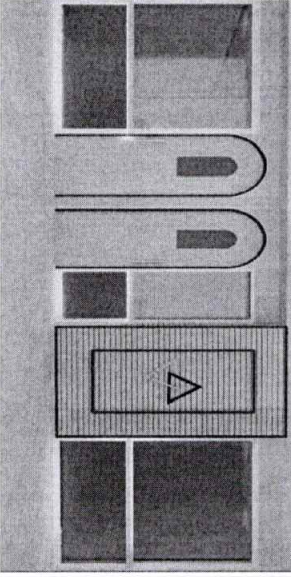
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
5	<p>This door to be made by using 16 gauge, 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. These partitions at their horizontal base and the vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 75 X 50 mm. at the bottom and top and both the rear sides. This framed structure to have 32 mm BWR Board in the centre of this framed structure. Fitting this half door on the framed section on both sides by using 9mm ply is to be done with out most care. Providing of every required hardwares such as hinges, tower bolt, handle of 300 mm size etc. are the part of the works. The entire exposed part of this framed solid partition to be sandwiched by using of the 9mm MR Grade Ply used for sandwiching which will be further covered by 1.5 mm thick laminate of approved color and shade. . The entire works to be done with outmost perfection and ready to use condition.</p>	PGM1	199	SQFT		
	PARTLY GLAZED PARTITION					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

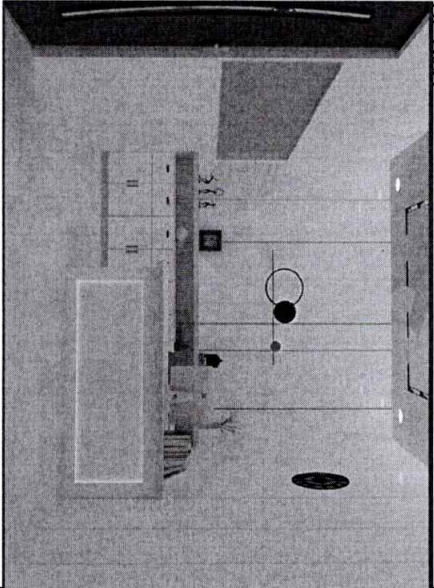
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>These Partitions are to be made by using 16 gauge , 50 Micron Anodized Aluminum section of 50mm x 50 mm thickness. The frame of this partition will have its one support at thr floor level while the other trespassing the false ceiling sections. These partitions at their horizontal bottom, Middle and top of Ventilator height including vertical extremes will be form a skeleton by using the Aluminum frame having a width & height of 150 X 100 mm. The internal partition within this frame will be at centre. This will be solid till the height of 840 mm from the floor level. This solid partition will have thickness of 75 mm, positioned at the centre of the outer frame of 150 mm. This partition will also be made up of Aluminum frame intermingled in a manner to provide the structure having these scion @ 600 mm from centre to centre. All the framed partition will be sandwiched by using 9mm thick MR Grade Ply sandwiching the frame where the sections are framed @600 mm from center to center. The upper part of this internal partition will have toughened glass positioned above 900 mm (approx.) till ceiling height. These box like framing to be provided at thr bottom & at the preferably at bottom and top of ventilator Positions, also.</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

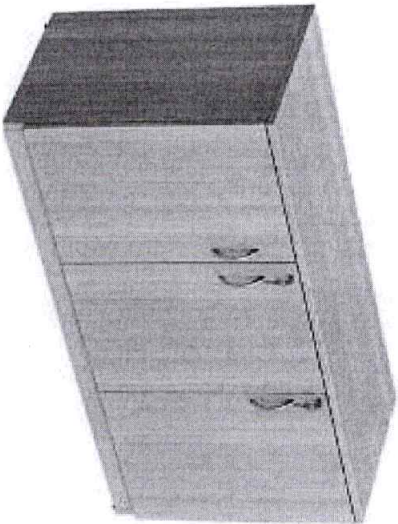
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The provision of the 1" Cove light to be provided at the bottom and on the other part of this box formed shapes in horizontal and vertical directions. 10 mm thick Toughened Glass without any joints along the length will be fitted on the upper portion above 900 mm (approx.) with the help of Glass catchers of approved design and make on this box sections. The partial part of these frames will be etched or frosted as per the design/drawing shown or provided. The entire exposed part of the 9mm Ply used for sandwiching the frame of this commodity will be covered by 1.5 mm thick approved color and shade, The Door of 32 mm thick BWR Grade door made by forming a framing by using 25mm thick BWR Ply having a Vision panel made up of toughened glass (450 mmX 450 mm) along with all the required accessories such as large Door Machine, 450 mm Large SS Handle, latches, door stopper etc. are the part of this works. Providing an Acrylic Sheet plate denoting the symbols various rooms as per their usage and as per approved design is included in the scope of the works.</p>					
6	STORAGES					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
A	<p>LOW HEIGHT STORAGES</p> <p>The Low height storages are to be manufactured by using 19 mm MR Grade Ply for the basic frame, door shutters of 25 mm thick MR Grade Ply and 12 mm BWR Grade Ply for the back side of the storage unit. The storage unit will be 750 mm high having an internal depth of 450 mm. 75 mm thick frame at the base of the storage is to be provided with steel rollers (At least 25 mm size. Number of rollers fitted in a way which can carry the weight of 45 Kg/Cft in movement). The entire storage is to be so made to be fitted in this frame which will be 525 mm deep and length, as per the provided module. The Top of this the storage will have 50 mm protruding Ply having thickness of 50 mm. This protruding section will have be edge bended from all sides. The storage will have a drawer having internal depth of 300mm running on heavy duty telescopic channel. This storage will also include an opening shouter with not more than 450 x 375 mm moving on ear-bhari hinges or s approved. The drawer portion will be separated by the shutter using 12mm BWR Grade Ply.</p>		331	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

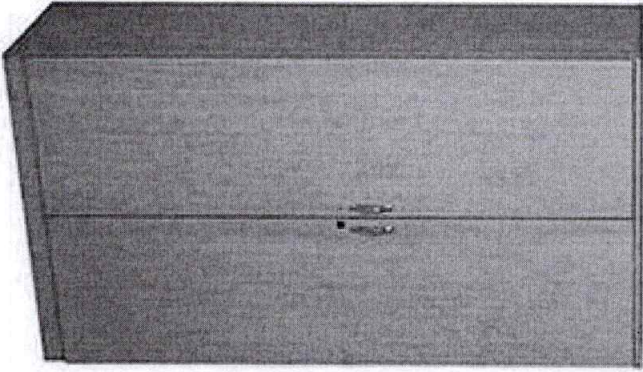
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>All the internal exposed Area of the storage will be covered by using 0.8 mm thick laminate while all the top exposed surface areas of the storage will be covered by using 1mm thick laminate of approved shade and color. One number of adjustable partitions is to be provided in the internal portion of area enclosed by the opening shutter. All the edges of the drawers/ shutters/internal partitions are to be edge banded. All the hardware's must be of SS 302 Grade . 125 mm long Handles Locks, latches, tower bolt, magnet catcher etc. , are some of the very important hardwares to be fitted for logevity of the component. Entire works to be carried out after the approval of the sample of the commodity by the appointed Architect/consultant of the Bank</p>					
B	FULL HEIGHT STORAGES		0	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The Full height storages are to be manufactured by using 19 mm MR Grade Ply for the basic frame, door shutters of 25 mm thick MR Grade Ply and 12 mm BWR Grade Ply for the back side of the storage unit. The storage unit will be 2100 mm high , approx. having an internal depth of 450 mm. 75 mm thick frame at the base of the storage is to be provided with steel rollers fitted in it. The entire storage is to be so made to be fitted in this frame which will be 525 mm deep and length, as per the provided module. the storage is to be provided with steel rollers (At least 25 mm size. Number of rollers fitted in a way which can carry the weight of 70 Kg/Cft in movement). The Top of this the storage will have 100 mm protruding Ply having thickness of 75 mm .with a provision of Light fitting made in it by laying SS Channel of 25 mm thick for treespassing of the wires. The cabinet to have an automatic arrangement of lighting up in the internal area during the opening of the Door/shutter of this full height cabinet. This protruding section will have be edge bended from all sides.</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>This storage will have a drawer above the bottom frame . Maximum internal sizes of this drawer to be 450mm x 450 mm with an height of 300 running on heavy duty telescopic channel. This storage will also include an opening shutter with not more than 450 x 1950 mm moving on hinges . The drawer portion will be separated by the shutter using 12mm BWR Grade Ply. All the internal exposed Area of the storage will be covered by using 0.8 mm thick laminate while all the top exposed surface areas of the storage will be covered by using 1mm thick laminate of approved shade and color. three number of adjustable partitions is to be provided in the internal portion of area enclosed by the opening shutter. All the edges of the drawers/ shutters/internal partitions are to be edge banded, All the Hardware must be of SS 302 Grade . 375 mm long Handles Locks, latches, tower bolt, magnet catcher etc. , are some of the very important hardware to be fitted for longevity of the component. Entire works to be carried out after the approval of the sample of the material by the appointed Architect/consultant of the Bank.</p>					
7	GRANITE WORKS					
A	FOR KITCHEN PLATFORM					

Tender Estimate

M/s Bhawna Enterprises Pvt Ltd
 An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
 Authorised Signatory
 On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>This kitchen Platform is to be made after casting a slab of 75 mm thick , with a width of 750 mm placed above an height of 750 mm from floor level. using 12mm bar spaced @ 150 mm from centre to centre with M25 Concrete. . The slab is positioned on the vertical support of the Kaddappa 2 stone of 12 mm thick each, making it 25 mm .. The size of them being 675 mm wide with an height of 750 mm. These kadammpa stone are basically fitted after the casting of the slab of kitchen at a minimum distance of 407 mm from one to another. This slab is than fixed by using 18 mm telephnic black color Granite on it. The granite nosing are provided half molding and good fine polishing on it. The kadappa stone for sink size 600 x 450 x 250 mm is fitted at an diffrence 750 mm from the another vertical kadappa stone . The entire works include providing of Swan Nexck Bib cock in sink along with an angle cock below the sink to regulate its working. All the coonections of water inlet and waste water outlet are to be done using UPVC Fittings of approved size and dimensions.</p>					
B	FOR PANTRY LUNCH PLATFORM					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

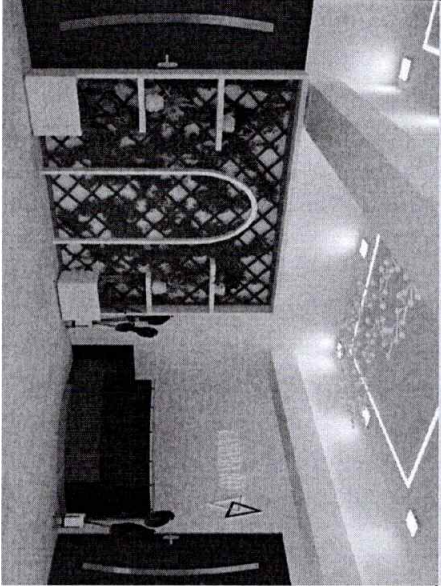
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
8	<p>This Lunch Platform is to be made after casting a slab of 75 mm thick , with a width of 750 mm placed above an height of 1050 mm from floor level. using 12mm bar spaced @ 150 mm from centre to centre with M25 Concrete. . The slab is positioned on the vertical support of the Kaddappa 2 stone of 12 mm thick each, making it 25 mm .. The size of them being 300 mm wide with an height of 1050 mm. These kadammpa stone are basically fitted after the casting of the slab of kitchen at a maximum distance of 650 mm from one to another. This slab is than fixed by using 18 mm telephnic black color Granite on it. The granite nosing are provided half molding and good fine polishing on it.</p>		122	SQFT		
	DISPLAY UNIT					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

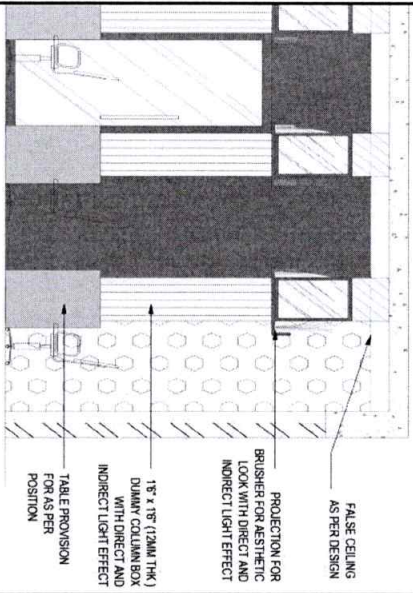
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>The display unit is to be made by using 25 mm thick MR Grade ply with 12 mm thick BWR Grade Ply for back side, having intermittent glass partitions, made up of Pencil molded 12 mm toughened glass placed at varied positions as per drawing/design provided. The Inner top most part of this unit must have a provision of Led strip light in a way falling on the task. The entire exposed areas of this module are to be covered by using 0.4 mm thick Acrylic sheet of approved color and design pattern. This module will be having frameless glass doors for closing the module. This frameless glass shutters will be made by using 12mm toughened glass. All the hardwires such as Glass catchers, magnet catchers, auto-hinges etc. are to be provided and commissioned as per the requirement of the works.</p>					
9	MAKING DUMMY PILLARS		0	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

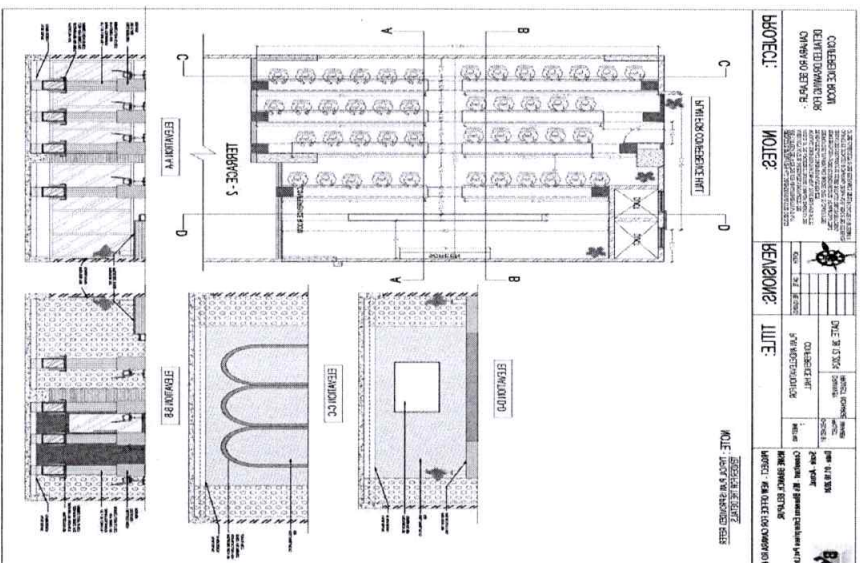
S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>These Dummy Pillars are to be positioned at various places but mostly in conference room . These Pillars are to be made by using 50 x 25 mm Aluminum Anodized hollow box section of 50 micron. These sections are to be webbed horizontally and vertically to provide the required structure. Generally webbed, in a style to have these Aluminum sections placed at 450 mm from C/C. The provision of electric wiring is to be done in it . This entire exposed frame is than covered by using 9 mm ply. This 9 mm exposed Ply is than covered using 1.5 mm thick Textured laminate (basic rate @ 140/sq.ft) .All the work is to be done and only continued after the authentic approval of the sample of this commodity. No extra cost on any account will be claimed by the vendor in completing this commodity as per the provided design or drawing.</p>					
10	WOODEN PANELLING					
A	FOR CONFERENCE HALL WITH SOUND INSULATION		900	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	QNTY (Sqft/No s)	UNIT	Rate/Unit AMOUNT (In Rs)
	<p>The wooden paneling for conference hall will be done by using rubber soling on the walls or use of thermocol affixed on the wall. This rubber/ thermocol sheet affixed on wall is than fixed by 50 x 25 mm Aluminium Anodized hollow box section of 50 micron, on it. These sections are to webbed horizontally and vertically to provide the required structure. Generally webbed, in a style to have these Aluminium sections placed at 450 mm from C/C. These intermittent areas between the sections are than fixed by using thermocol sheet The provision of electric wiring is to be done in it and the speakers as per the site requirement are mounted at different places and angles. This entire exposed frame is than covered by using BWR 9 mm ply. This BWR 9 mm exposed Ply is than covered using 1 mm thick laminate of approved shade and color. All the work is to be done and only continued after the authentic approval of the sample of this commodity. No extra cost on any account will be claimed by the vendor in completing this commodity as per the provided design or drawing.</p>			
B	<p>WOODEN PANELLING TO RESTORE AMBIENT TEMPERATURE.</p>	1645	SQFT	



Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

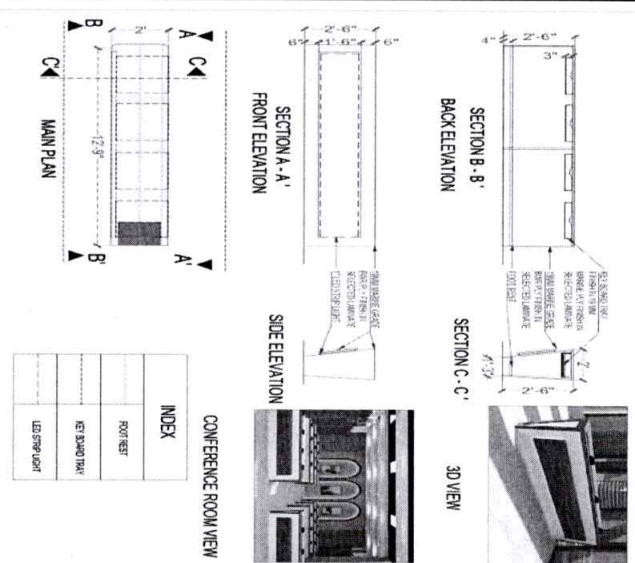
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>This wooden panelling is done by using 50 x 25 mm Aluminium Anodized hollow box section of 50 micron. These sections are webbed horizontally and vertically to provide the required structure. Generally webbed, in a style to have these Aluminium sections placed at 450 mm from C/C. These intermittent areas between the sections are than filled by using husk/polyfill fibre etc. The provision of electric wiring is to be done in it. This entire exposed frame is than covered by using 9 mm BWR ply. This BWR 9 mm exposed Ply is than covered using 1 mm thick laminate of approved shade and color. . All the work is to be done and only continued after the authentic approval of the sample of this commodity. No extra cost on any account will be claimed by the vendor in completing this commodity as per the provided design or drawing.</p>					
11	MODULAR WORKS STATION FOR CUBICALSAND CONFERENCE HALLS					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	QNTY (Sqft/No s)	UNIT	Rate/Unit AMOUNT (In Rs)																																				
A	<p>FOR CONFERENCE HALL - These working station comprise of 25 mm thick MR Plywood top of width 600 mm positioned on vertical support at an height of 750 mm which is made by using 18 mm thick MR Grade Plywood. These work stations have all the provisions of 8 module/ 450RFT, switch board to receive UPS Supply, on the inner part of the cubical. along with a drawer of 250 x 250 x 250 mm running on telescopic channel with a key lock arrangement for every 450 ft or as per approval. The wiring is to be laid by using 40 mm thick tray horizontal and vertical trays made up of 0.5mm Acrylic sheet positioned at an height of 500 mm or as per final design, on the inner part of this vertical ply. The upper part of this Platform will have a provision of 75 mm x 75 mm made for carrying data cable, electrical wires with holders for Mikes on it. This box like section will have SS Channels, in some part of the sections, on which 0.5 mm thick Acrylic sheet will slide. All the edges of this module will be edge banded by machine. Provision of Tilted Leg stand and inner shelve with a width of 300 mm made across the entire length of at an vertical height of this module positioned at an height of 600 are the part of the works.</p>	110	RFT																																					
<p align="center">IMAGE OF THE MODULE WITH SOME DETAIL</p>  <p align="center">INDEX</p> <table border="1"> <tr><td>CONFERENCE ROOM VIEW</td></tr> <tr><td>FRONT ELEVATION</td></tr> <tr><td>SIDE ELEVATION</td></tr> <tr><td>SECTION A-A</td></tr> <tr><td>SECTION B-B</td></tr> <tr><td>SECTION C-C</td></tr> <tr><td>MAIN PLAN</td></tr> <tr><td>3D VIEW</td></tr> </table> <p>PROJECT: CANARA RO BELAPUR - DETAIL DRAWING FOR CONFERENCE HALL</p> <p>NOTES: 1. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SPECIFIED. 2. FINISHES TO BE AS PER SPECIFICATION. 3. ALL WORK TO BE DONE IN ACCORDANCE WITH THE LATEST VERSIONS OF IS AND BS STANDARDS. 4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY APPROVALS FROM THE AUTHORITIES CONCERNED. 5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES. 6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES. 7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES. 8. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES. 9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES. 10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING SERVICES AND STRUCTURES.</p> <p>REVISIONS:</p> <table border="1"> <tr><th>NO.</th><th>DATE</th><th>DESCRIPTION</th></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table> <p>CONFERENCE TABLE</p> <table border="1"> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </table> <p>NOTE: 1. THIS DRAWING IS FOR CONFERENCE TABLE.</p> <p>PROJECT: NEW OFFICE FOR CANARA BANK BELAPUR BELAPUR</p> <p>DATE: 28/12/2011</p> <p>SCALE: 1:10</p> <p>DESIGNER: M/S. BHAWNA ENTERPRISES PVT. LTD.</p> <p>CHECKED BY: M/S. BHAWNA ENTERPRISES PVT. LTD.</p> <p>DATE: 28/12/2011</p> <p>SCALE: 1:10</p> <p>DESIGNER: M/S. BHAWNA ENTERPRISES PVT. LTD.</p> <p>CHECKED BY: M/S. BHAWNA ENTERPRISES PVT. LTD.</p>		CONFERENCE ROOM VIEW	FRONT ELEVATION	SIDE ELEVATION	SECTION A-A	SECTION B-B	SECTION C-C	MAIN PLAN	3D VIEW	NO.	DATE	DESCRIPTION																												
CONFERENCE ROOM VIEW																																								
FRONT ELEVATION																																								
SIDE ELEVATION																																								
SECTION A-A																																								
SECTION B-B																																								
SECTION C-C																																								
MAIN PLAN																																								
3D VIEW																																								
NO.	DATE	DESCRIPTION																																						

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

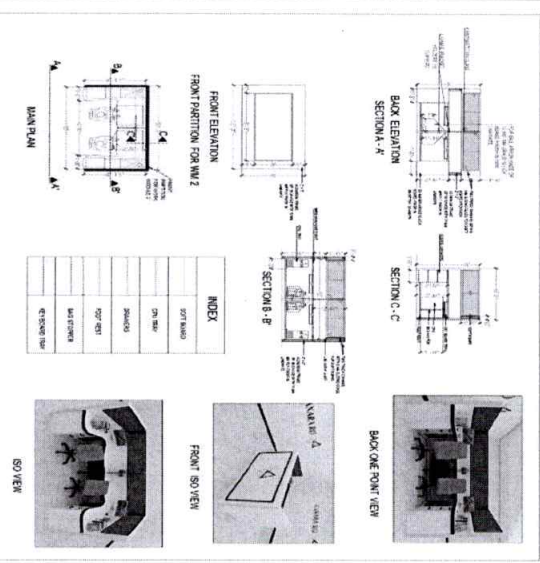
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>Providing all te required hardware's of SS 302 Grade like channels acting as a slider on the mounted stand of these tables . The entire works are to be carried out as per the approved sample.All the exterior part of this module will be covered using 1.5mm thick laminate of approved shade and color while all the internal exposed will be covered using 0.8mm thick laminate of approved shade and pattern. The entire works are to be carried only after the authentic approval of the sample by the appointed Architect/ Consultant</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N 0	ITEM DESCRIPTION	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
B	<p>For Cubicles/ other works stations. - These working station comprise of 25 mm thick MR Plywood top of width 750 mm positioned on vertical support at an height of 750 mm by using SS 302 Angles of 75 mm x 75 mm on all sides as per the requirement provided on the adjacent partitions blocks. The modesty panel of this module will have a size of 450 x 450 x 750 mm (LXW X H) made up of SS 302 Grade (16 Gauge) having 2 no of drawers of varying sizes with one shutter having adjustable partition or as approved by the consultant with a key lock arrangement. This module will be required to have internal shelve made up of 25 mm thickness positioned at 500 mm having a depth of 300 made by using 18 mm thick MR Grade Plywood. These work stations have all the provisions of 8 module switch board to receive UPS Supply, on the inner part of the cubical. The wiring is to be laid by using 50 mm thick tray horizontal and vertical trays made up of 0.5mm Acrylic sheet positioned at an height of 450 mm or as per final design, on the inner part of this vertical ply. The top most part will have vertical stand for lifting of Screen. This vertical stand must have all the features like rotational, tilt etc.</p>	190	RFT		
					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

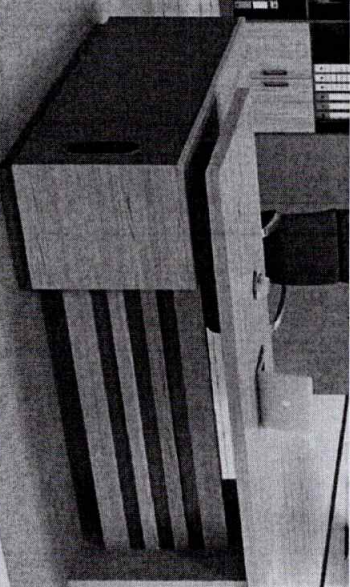
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	<p>All the edges of this module will be edge banded by machine. Provision of Tilted Leg stand, CPU Trolley, cable tray, locks SS Channels and inner shelve with a width of 300 mm made across the entire length at a vertical height of this module positioned at an height of 500 are the part of the works. Providing all the required hardware's of SS 302 Grade like channels acting as a slider on the mounted stand of these tables. The entire works are to be carried out as per the approved sample. Cable Management Wire-management Baskets are manufactured using 3mm steel wire. They run the whole length of each workstation. Baskets use polymer connectors to suspend from the twin-beam understructure. Umbilical risers bring cables from the floor to the basket, are manufactured using 80mm diameter injection-moulded polymer components, providing cable segregation and cable clamping in accordance to</p>					
12	MODULAR TABLES					
A	OFFICERS TABLE		1	NOS		

Tender Estimate
 M/s Bhawna Enterprises Pvt Ltd
 An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
 Authorised Signatory
 On behalf of the Tenderer.

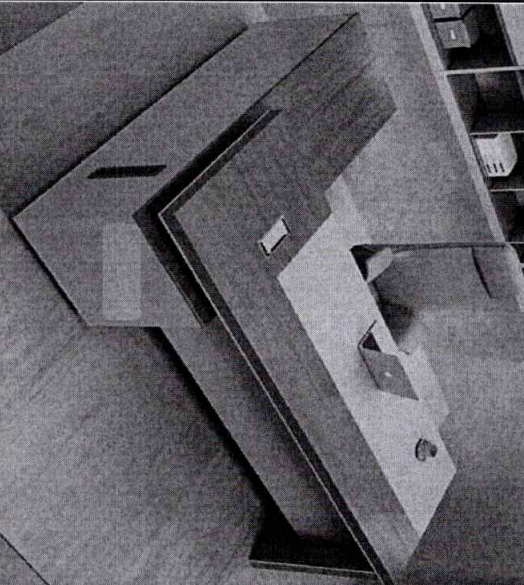
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
A	<p>Providing and fixing table for AGM of size FROM 6 ft to 7 ft X3'0"to 3.5 ftX2'6" height the top . sides will be made of 25 thick MR Grade ply of approved make. This table will have ABS machine edge bending of 6mm on every edge . The edge of the top of the table will be shown to be of 50 mm thick in the entire prepary. This table will have a side table of 3ft x 2ft x 2.3 ft, as shown in the detail design . The Side and front will be made by using 12mm thick marine grade ply affixed on top of the board in order to have peculiar shape . This module will have 2 no of modesty panel . One in the front table while the other in the side table, as shown. The table will have all the encasing of wires done in 0.5 mm thick acrylic tray. The table will have elevated LCD Screen stand which can be tilted and also rotate as per requirement. of this unit will have the required drawer and shutters as shown in the drawing/design. This table is built in 2 tiers, as shown. The drawers will be required to run on telescopic channel the size of modesty panel will be 18"x 24"x30" . All the external exposed area of this unit will be finished by using 1mm laminate while the internal area will be required to be finished with 0.8 mm thick Laminate of approved shade/color. All the necessary Hardware's i.e</p>					
B	EXECUTIVE TABLES FOR AGM & DGM		2	NOS		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
B	<p>Providing and fixing table for AGM of size FROM 7 ft to 8'0"x3'0"to 3.5 ftx2'6" height the top . sides will be made of 25 thick MR Grade ply of approved make. This table will have ABS edge bending of 6mm on every edge . The edge of the top of the table will be shown to be of 50 mm thick in the entire prephary. This table will have a side table of 4 ft x 2ft x 2.3 ft, as shown in the detail design . The Side and front will be made by using 12mm thick marine grade ply affixed on top of the board in order to have peculiar shape . This module will have 2 no of modesty panel . One in the front table while the other in the side table, as shown. The table will have all the encasing of wires done in 0.5 mm thick acrylic tray. The table will have elevated LCD Screen stand which can be tilted and also rotate as per requirement. of this unit will have the required drawer and shutters as shown in the drawing/design. This table is built in 2 tiers, as shown. The drawers will be required to run on telescopic channel the size of modesty panel will be 18"x 24"x30". All the external exposed area of this unit will be finished by using 1mm laminate while the internal area will be required to be finished with 0.8 mm thick Laminate of approved shade/color. All the necessary Hardware's i.e Telescopic channel, Handles, Locks, Hinges etc shall be of approved make in SS finished. Providing and fixing of 12 mm toughened glass with Pencil edge molding around all the corners on Glass stoopers is the part of the works.</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

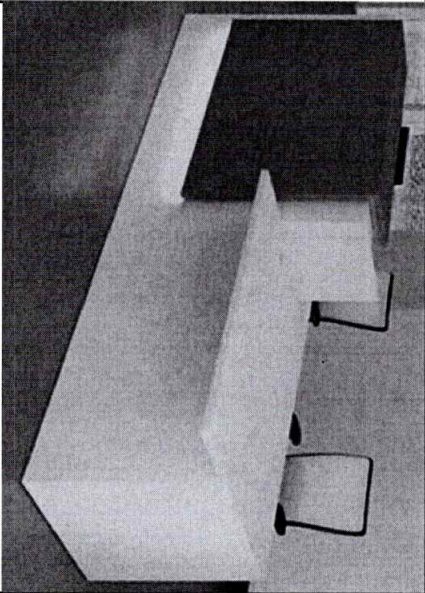
BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	Telescopic channel, Handles, Locks, Hinges etc shall be of approved make in SS-392 are to have the best finish. Providing and fixing of 12 mm toughened glass with Pencil edge molding around all the corners on Glass stoopers is the part of the works.					
C	RECEPTION TABLE		16.7	RFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
C	<p>Providing and fixing table for Reception table with top of 2.5 ft width, length as per the drawing module having a height of 3.9 ft from the ground level.. The top and sides will be made of 25 thick MR Grade ply of approved make. This table will have ABS edge bending of 6mm on every edge . The edge of the top of the table will be shown to be of 50 mm thick in the entire prephary. The Side and front will be made by using 12mm thick marine grade ply affixed on top of the board in order to have peculiar shape . This module will have 2 no of modesty panel . This table will have one modesty panel with a provision of drawers along the length of the table with a minimum depth of 450 mm and width of 459 mm, running of telescopic channels. . The table will have all the encasing of wires done in 0.5 mm thick acrylic tray. The table will have elevated LCD Screen stand which can be tilted and also rotate as per requirement. of this unit will have the required drawer and shutters as shown in the drawing/design. This table is built in 2 tiers, as shown. The drawers will be required to run on telescopic channel the size of modesty panel will be 18" x 24"x30". All the external exposed area of this unit will be finished by using 1mm</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	laminated while the internal area will be required to be finished with 0.8 mm thick Laminate of approved shade/color. All the necessary Hardware's i.e Telescopic channel, Handles, Locks, Hinges etc shall be of approved make in SS finished. Providing and fixing of 12 mm toughened glass with Pencil edge molding around all the corners on Glass stoopers is the part of the works. Two number of Receptions table are to be made one for Regional office (Top Image)					
13	FALSE CEILING WORKS					
A	GYPSUM CEILING WORKS		5821	Sqft		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
A	<p>False Ceiling Work:-</p> <ul style="list-style-type: none"> Gypsum Ceiling: - This work shall be done in accordance with the specifications as mentioned in the process of making of Gypsum India Ceiling & its framing , nomenclature of the company. This should also be in relevance to the DSR 2012, 12.45 which mentions - Providing and fixing false ceiling at all height including providing and fixing of frame work made of special sections, power pressed from M.S. sheets and galvanized with zinc coating of 120 gms/sqm (both side inclusive) as per IS : 277 and consisting of angle cleats of size 25 mm wide x 1.6 mm thick with flanges of 27 mm and 37mm, at 1200 mm centre to centre, one flange fixed to the ceiling with dash fastener 12.5 mm dia x 50mm long with 6mm dia bolts, other flange of cleat fixed to the angle hangers of 25x10x0.50 mm of required length with nuts & bolts of required size and other end of angle hanger fixed with intermediate G.I. channels 45x15x0.9 mm running at the spacing of 1200 mm centre to centre, to which the ceiling section 0.5 mm thick bottom wedge of 80 mm with tapered flanges of 26 mm each having lips of 10.5 mm, at 450 mm centre to centre, shall be fixed in a direction perpendicular to G.I. intermediate channel 					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
A	<p>with connecting clips made out of 2.64 mm dia x 230 mm long G.I. wire at every junction, including fixing perimeter channels 0.5 mm thick 27 mm high having flanges of 20 mm and 30 mm long, the perimeter of ceiling fixed to wall/partition with the help of rawl plugs at 450 mm centre, with 25mm long dry wall screws @ 230 mm interval, including fixing of gypsum board to ceiling section and perimeter channel with the help of dry wall screws of size 3.5 x 25 mm at 230 mm c/c, including jointing and finishing to a flush finish of tapered and square edges of the board with recommended jointing compound , jointing tapes , finishing with jointing compound in 3 layers covering upto 150 mm on both sides of joint and two coats of primer suitable for board, all as per manufacturer's specification and also including the cost of making openings for light fittings, grills, diffusers, cutouts made with frame of perimeter channels suitably fixed, all complete as per drawings, specification and direction of the Engineer in charge. Usage of fire resistant Board as per DSR 2021 -22, Which reads - 12.5 mm thick tapered edge gypsum fire resistant board conforming to IS: 2095- Part I. This board to be covered by using approved shade of Royal touch paint or</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	equivalent. No extra payments will be provided for the Primer, Paints etc. The works include each and every thing complete as Per Architects recommendation , for the ceiling to be used in ready to use condition.					
B	ARMSTRONG CEILING		135	SQFT		

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
B	<p>• Arm Strong Ceiling: - This ceiling will be done strictly based on the guidelines provided in the specification of the company --- Armstrong. Providing and fixing tiled false ceiling of approved materials of size 595x595 mm in thorizontal level, suspended on inter locking metagrid of hot dipped galvanized steel sections (galvanized @ 120 grams/sqrm, both side inclusive) consisting of main "T" runner with suita spaced joints to get required length and of size 24x38 mm made from 0.30 mm thick (minimum) sheet, spaced at 1200 mm center to cente and cross "T" of size 24x25 mm made of 0.30 mm thick (minimum) sheet, 1200 mm long spaced between main "T" at 600 mm center tocenter to form a grid of 1200x600 mm and secondary cross "T" of length 600 mm and size 24x25 mm made of 0.30 mm thick (minimum) sheet t be interlocked at middle of the 1200x600 mm panel to form grids of 600x600 mm and wall angle of size 24x24x0.3 mm and laying false ceiling tiles of approved texture in the grid including, required cutting /making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using GI slotted cleats of size 27 x 37 x 25 x1.6 mm fixed to ceiling with 12.5 mm dia and 50 mm long dash fasteners, 4 mm GI adjustable rods with galvanized butterfly level clips of size 85 x 30 x 0.8 mm spaced at 1200 mm center to center along main T, bottom exposed width of 24 mm of all M T- sections shall be pre-painted with</p>					

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqft/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
	polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-charge. Usage of fire resistant Board as mentioned in DSR 12.52.3 that is 12.5 mm thick square edge PVC Laminated Gypsum Tile of size 595x595 mm, made of Gypsum plasterboard, manufactured from natural					
	gypsum as per IS 2095 part I and laminated with white 0.16mm thick fire retardant PVC film on the face side and 12micron metalized polyester on the back side with all edges sealed with the face side PVC film which goes around and wraps the edges and is bonded to the edges and the back side metalized polyester film so as to make the tile a completely sealed unit.					
14	PAINT ON WALLS /CEILINGS					
A	Royal touch or equivalent The Paint on walls will be done by at first leveling it by punning the surface with gypsum and then as per company's specification which include rubbing the wall, leveling it, by using wall putty and then coating this wall by using Royal touch Paint or equivalent as per Manufacturers manual. The color, shade etc. And its sample is to be approved by the appointed Architect/ Consultant. and its only after the approval of the sample the works will be continued.		0	SQFT		

Tender Estimate

M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.

BILL OF QUANTITIES OF FURNISHING WORKS FOR NEW RO OF CANARA BANK AT CBD BELAPUR, MUMBAI .

S.N O	ITEM DESCRIPTION	IMAGE OF THE MODULE WITH SOME DETAIL	QNTY (Sqt/No s)	UNIT	Rate/Unit	AMOUNT (In Rs)
B	Royal Play or equivalent The Paint on walls will be done by at first leveling it by punning the surface with gypsum and then as per company's specification which include rubbing the wall, leveling it, by using wall putty and then coating this wall by using Royal play Paint or equivalent as per Manufacturers manual. The color, shade etc. And its sample is to be approved by the appointed Architect/ Consultant. and its only after the approval of the sample the works will be continued.		0	SQFT		
			TOTAL Rs			
Gross Amount Tendered (In words)						
Discount If Any (In Percent)						
Amount Tendered after deduction of Discount (If any)						
GST Charges - (In Rs)						
Net Total Amount of works in Figure						
Total Net Amount Tendered - In figures						
In words -						
G.Total Project Cost (In Rs)						

Tender Estimate
M/s Bhawna Enterprises Pvt Ltd
An Enterprises of Architects, Valuers Interior Designers

Seal with Signature
Authorised Signatory
On behalf of the Tenderer.