

**ELECTRICAL WORKS IN NEW PREMISES OF BALLARY CANTONMENT BRANCH (BALLARY RO)**

Location of the Branch/Office	<b>BALLARY CANTONMENT BRANCH (BALLARY RO)</b>
Eligibility of the contractor	Eligible Electrical Contractors empanelled with Circle Office: Hubballi
EMD	Exempted for Contractors Empaneled with Circle Office: Hubballi
Address for submission of sealed tenders	Circle Office: Hubballi
Last date & time for submission of sealed tenders	<b>02.08.2025 up to 3:30 pm</b>
Date & Time of opening of sealed tenders	<b>02.08.2025 up to 4:00 pm</b>
Payment terms	As per IBA norms.
Time limit for execution of work	<b>30 days</b> from the date of work order
Defect liability period	12 months after completion of work
Retention money towards defect liability period	3 % of final bill amount
Date of commencement of work	As per work order
Income Tax &/ other taxes	At applicable rate
Payment	After the completion of the work, as per procedure
Period for submitting final bill by contractor	Within one month from the date of virtual completion of the work
Liquidated damage for non completion of work in time	<b>1% OF THE TENDERED AMOUNT per week and part thereof for the delayed period maximum of 10%.</b>
Rates quoted by bidder	I. The quoted rate should be inclusive of Cost of materials, transport, loading , unloading charges, cost of installation, all taxes <b>(excluding GST)</b> , wastages, machinery, temporary works such as scaffolding, cleaning, overheads, profit, statutory expenses, incidental charges and all related expenses required for the completion of the work. II. Additional claims other than the quoted amount will not be entertained. III. The quoted rates shall be firm throughout the completion of the project
Insurance	Falls under scope of contractor.
Validity of submitted tender	90 days from the opening of tenders

The sealed tender must be dropped in tender box kept at the Circle Office within the above stipulated time. Tenderers / authorized representative are requested to be present at the time of opening. Canara Bank will not be bound to accept the lowest tender & reserves the right to reject any or all the tenders without assigning any reason thereof.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

To

The Assistant General Manager,  
P & E Section,  
Canara Bank Circle Office,  
Hubballi - 580030.

Dear Sir,

Sub: Electrical works in the premises of **BALLARY CANTONMENT BRANCH (BALLARY RO)**

I/We hereby declare that I/ We have carefully gone through the conditions laid down in the Notice Inviting Tender, General notes, General Conditions of Contract, Special conditions, Schedule of approximate quantities and rates, Form of Agreement, General Specification, Approved manufacturers/natural source of materials Technical Specifications of schedule of quantities, and clearly understood all the same and on the basis of the same I/ We have quoted our rates in the Schedule of Quantities(i.e. BOQ) attached with the tender documents.

I / We have enclosed herewith a Demand Draft of \_\_\_\_\_ .Bank & No. \_\_\_\_\_ dated \_\_\_\_\_ favoring **Premises & Estate Section, Circle Office, Canara Bank, Hubballi** for ₹ \_\_\_\_\_ payable at Hubballi, towards E.M.D.

In the event of this Tender being accepted I/ We agree to enter into the agreement and submit the declaration on requisite non-judicial stamp papers as and when required and execute the contract according to your form of Agreement etc., in default whereof, I/ We do hereby bind my-self / ourselves to forfeit the aforesaid deposit.

I / We further agree to complete the work included in the said schedule of quantities within specified time from the date of the work order issued to commence the same.

I / We agree to pay all taxes(except GST), insurance charges as prevailing from time to time, on such items for whom same is to be levied by/ for the government, and the rates quoted by me / us are inclusive of all the same.

Once again knowing fully well the contents of this tender, I / We sign this tender on this \_\_\_\_\_ Day of \_\_\_\_\_ month of 2023.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

**SPECIAL CONDITIONS & INSTRUCTIONS FOR THE GUIDANCE OF TENDERER**

1. The works at the branch/Office premises need to be executed duly taking care of the local bye laws/regulations of the local authorities like Police Dept, Water supply and Sanitary Board, Electricity Board, Central/ State Labor Commission etc. Necessary permissions, licenses, temporary connections if needed shall be obtained by the Contractor and Bank shall not be held responsible for any lapses.
2. The works shall be executed duly taking care of all safety measures and Bank shall be fully indemnified for any 3<sup>rd</sup> party claims, casualties, mishaps, loss of property etc. related to the undertaking & the execution of the subject work.
3. GST TAXES: As per the new Goods & Services Tax (GST) structure, the tenderers are required to have GSTIN number & Tenderers without GSTIN number are not eligible to participate in the tender process. The details as per the Annexure I attached are to be mandatorily furnished along with the tender. The eligible tenderers are requested to quote the GST separately. The taxes will be deducted at source as per the statutory requirements. While raising the bill, it shall be mentioned as bill to Canara Bank and our Bank's GSTIN number to be mentioned.
4. CANARA BANK'S KARNATAKA STATE GSTIN NUMBER is 29AAACC6106GIZX.
5. Tenderers are requested to submit the EMD in the form of crossed Demand draft only on any of the nationalized Banks/State Bank Drawn in favor of Premises & Estate Section, Circle Office, Canara Bank, Hubballi, payable at Hubballi. Tender with EMD in any other forms shall be rejected.
6. Tenderers are expected to visit the site before quoting the rates and should satisfy themselves as to the nature and conditions of work facilities available etc.
7. The tenderers are required to examine the enclosed general plan, tender form and conditions mentioned in the tender.
8. The tenderers should quote the rates in the figures. The amount for each item should be worked out and the requisite totals shall be given. The total amount shall be written both in figures and words.
9. The rates quoted in the tender shall be for measured finished works and shall include all changes including cost of materials, transportation, freight charges etc. complete.
10. The work is to be completed within stipulated time.
11. The successful tenderers shall give all necessary personal attention to the work during the process of work and also until the expiry date of "Defects Liability Periods" which is **12 months** after the date of completion of the work.
12. The bank reserves the right to reject any portion of the work or material, which is, found unsatisfactory not up to the standard.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

Gokul Road, Hubballi-580030

Internal Page 3 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

13. A retention amount of **3% of the bill amount** will be retained from the final bill and shall be paid to the successful tenderers after the defects liability period is over and upon the certification of the engineer.

14. Income tax deduction at prevailing / appropriate rates will be retained from each running bill which will be certified by the income tax authorities and a receipt will be given to the contractors.

### CONDITIONS OF CONTRACT

1. If any additions and alterations are found necessary, the tenderers will have to do the same within the tendered rates with the prior approval of the bank.
2. The contractor shall employ adequate labor to complete the work within the scheduled time and shall make his own arrangements for housing his materials etc.
3. The contractor shall have to make his own arrangements to house his labor and staff for their services.
4. All tendered rates shall include for the cost of materials, labor, supervision, tools, plant, transportation, contingencies, duties, breakages, wastages, sundries, scaffolding, etc complete.
5. All instruction regarding the execution of the work shall be received from the officials through consultant/architect only. Any other instructions issued directly to the contractor by anyone else shall not be binding on the bank.
6. The bank shall have the power to omit or cancel any item of work without assigning any reason whatsoever and no claim for compensation for damage will be entertained for such omissions and cancellation.
7. The contractor shall maintain satisfactory progress of work as well as maintain a desired level of workmanship. If in the opinion of the bank the progress is unsatisfactory and / or the workmanship is unsatisfactory then the bank shall take possession of the work **within 7 days** to that effect. The bank shall then complete the entire work and rectify all the defects at the contractor's cost and consequences.
8. In case the bank is not satisfied with the quality of materials used by the contractors, they reserve the right to direct the contractor to procure such materials supplied from agencies they deem fit.
9. The contractor is to be responsible for clearing any, all dirt and rubbish and superfluous materials as they accumulate and everything unnecessary and to leave the premises in a clean and orderly condition on completion and fit for occupation. No extra payment shall be made for doing this.
10. Any work which is not approved by the bank shall have to be removed within 24 hours from the time of order and shall have to be redone by the contractor at his own cost and this cost will be borne by the contractor.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 4 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

11. No deviation whatsoever for any reason will be permitted, however, if any deviation becomes necessary, the same should be brought to the immediate notice of the bank and written approval must be obtained for such deviation before proceeding with the execution of work.
12. The bank has got the right to supply any materials required for the work and cost of materials so supplied will be deducted from the bills of the successful contractor.
13. The contractor shall be responsible for safe custody of his materials/materials issued to him by the bank till they are used for the work. He shall make his own arrangements for the safe custody and proper storage and preservation in sound condition till the same are actually used in the work.
14. The tenderers shall extended full co-operation to the other contractor /agencies like electrical, air conditioning, Fire & CCTV, LAN etc who are also working for the same project and co-ordinate with them in finishing the awarded work within the stipulated time given.
15. The contractor shall have a competent supervisor on the site for all the time.
16. For any new item the rate will be fixed by the bank as per prevailing fair market rate and labor which will be binding on the contractor.
17. In case the brand of materials mentioned in the tender is not available in the market, the alternate brand shall be used only after prior written approval of the bank.
18. The contractor shall be given a single electrical connection at work site. Electrical charges for consumption by the contractor will be charged separately by the bank, contractors have to provide sub-meter.
19. The successful tenderers shall not anticipate any financial help from the bank in the form of adhoc payment / advance for mobilizing and for starting the work.
20. The contractor should strictly adhere to the specifications and make of the materials, mentioned in the annexure. Any deviation will summarily reject the items of the work and not qualify for payment.
21. The successful tenderers shall be ready to carry out works between non banking hours and even at nights and holidays. The contractor should sign all the pages of the document and the same shall be submitted to us.

Acceptance of contractor for Labor laws

- The successful tenderers / Contractor shall carefully and diligently implement the provisions of the Contract Labor Act & Contract Labor Rules.
- The Bank shall be entitled to deduct from the Contract Consideration, any such amount which the Bank has to pay in accordance with the Contract Labor (Regulation & Abolition) Act 1971 and Workmen's Compensation Act, in the event of the Bank having to disburse compensation / effect any payment under the Contract Labor Acts / Rules.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 5 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

- Please note that as per rule 81(1) of Contract Labour (R&A) Rules, 1971, it is mandatory on the part of the Contractor to the display the notice containing the following details at prominent place at the work site.
- Rates of wages.
  - Hours of work.
  - Wage periods.
  - Dates of payment of wages.
  - Names & addresses of the Labor Inspectors having jurisdiction &
  - Date of payment of unpaid wages.

The notice containing the above details shall be displayed without fail at the work site.

- The Contractor shall not engage any workmen for wages, less than the minimum wages prescribed under the notification issued by the Central Government.
- The contractor should follow all labor laws/guidelines laid down by central /state government from time to time.
- ABNORMALLY HIGH AND LOW RATED ITEMS :

For item rate tenders if, the rates quoted by the lowest bidder for certain items of the Bill of Quantities of the tender are found to be abnormally high or low in comparison to the market rate analysis of the item done by the Architects/Bank and or in comparison to Architect/Bank's method of working out market rate justification for the items, the same shall be governed as under in order to avoid financial loss to the Bank in the event of default of Bidders.

- For abnormally high rated items (AHR), the progressive payment shall be 80% (eighty percent) of the payment due to the Bidder against execution of the AHR item. The balance withheld 20% payment shall be released after 75% of total value of the original contract is complete in financial terms or this 20% withheld payment can be released to the Bidder on submission of an unconditional bank guarantee of equivalent amount in the proforma of Bank. Further deviation limit for AHR items shall be nil on plus side and Bank reserves the right to restrict, substitute or not execute the AHR items during execution. The decision of the Architect/Bank's Engineer in this regard shall be final and binding on the Bidder.
- For abnormally low rated (ALR) items the Bidder shall submit Bank Guarantee of difference in total of amount of ALR item(s) and the total amount of corresponding items at market rate of the Architect/Bank. This bank guarantee shall be valid till completion of the project. In exceptional circumstances, the amount of Bank Guarantees (BG) may be reduced or BG released earlier than completion period if, in view of Architect/Bank's Engineer, all ALR items as provided in the contract are executed as per terms of contract and/or not required to be executed.

Notwithstanding what is contained in Para i) & ii) above, the provisions of Para (i) and (ii) shall not be applicable on tenders invited on percentage rate basis.

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 6 of 20

T: 08362-2239432/433 /434

E: pecohub@canarabank.com

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

The decision of the Bank on identification/ marking of AHR and ALR item are final and binding on the Bidder. In case the Bidder do not agree for furnishing of Bank Guarantee as above towards ALR items, at the time of award of works, the EMD/Performance guarantee of the Bidder shall be forfeited and decision of Architect in this regard shall be final and binding on the Bidder.

CERTIFICATE

I/ WE HAVE READ, FULLY UNDERSTOOD THE ABOVE MENTIONED REGULATIONS OF LABOUR LAWS/GUIDELINES AND ACCEPT THE SAME IN TOTO. I ALSO UNDERTAKE TO FOLLOW ALL LABOUR LAWS/GUIDELINES LAID DOWN BY CENTRAL /STATE GOVERNMENT FROM TIME TO TIME & INDEMNIFY THE BANK AUTHORITIES.

ANNEXURE I (TO BE MANDATORILY FURNISHED)

1.	Name of the Contractor under the Contract Labor (Regulation and Abolition) Act, 1970 (37 of 1970) (if applicable)	
2.	LIN / PAN No	
3.	Email Id	
4.	Mobile No.	
5.	No. & date of Certificate of Registration/ License*	
6.	Name of Person in charge of work	
7.	LIN / PAN No. of the person in charge of work	
8.	Email Id of the person in charge of work	
9.	Mobile No. of the person in charge of work	

\* Please strike off whichever is not applicable

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 7 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

APPROVED LIST OF MATERIALS

SL NO	ITEMS	MAKES
1	MCCB / MCB - C Curve ( All 10 kA Category)	Legrand, L & T, Merlin Gerin, Hager, GE, C&S, Schneider Electric.
2	ISOLATOR	LEGRAND
3	SWITCHES , SOCKETS (MODULAR) & MODULAR BOX	LEGRAND (MYRIUS / ARTEOR ) / ANCHOR-WOODS//SCHNEIDER (ZENCELO), Anchor Panasonic - Vision, M,K India Wraparound
4	CHANGE OVER SWITCH	L&T/ C&S/HPL
5	INSULATED WIRES (FRLS) CABLES	ANCHOR / FINOLEX / HAVELS/RR Kabel/Polycab
6	CABLE GLANDS & LUGS	SIEMENS
7	POWER CABLES	Finolex/ Polycab /HAVELS
8	LIGHT FITTINGS	HAVELL'S /WIPRO/ PHILIPS
9	FAN	(CROMPTON / HAVELL'S ') (WHITE COLOUR)
10	16" WALL FAN	ALMONARD/ CROMPTON/HAVELLS/ USHA (WHITE COLOUR)
11	12"/9" EXHAUST FAN	CROMPTON / ALMONARD with double ball bearing only
12	DBS	Hager, Merlin Gerin, Legrand, GE, C & S
13	TIMER	LEGRAND Model: 649 915 / SIEMENS
14	ELECTRONIC REGULATORS	ANCHOR ROMA
15	CASING CAPPING	MODI'S, GEMINI with ISI MARK
16	PVC conduit Pipe White/grey colour FRLS pipes only.	Avon Plast, Precision, Polycab, G.M with ISI mark
17	G.I. B-CLASS PIPES (ISI)	ITC, PRAKASH
18	Telephone Wires/Cables	Delton, Finolex/ R.R Kabel (0.5 mm dia)
19	MEASURING INSTRUMENTS	A.E., IMP, MECCO, SIEMENS
20	DOUBLE RJ 11	ANCHOR ROMA / LEGRAND

NOTE: Any brands indicated under the items specifications in the Bill of quantities will prevail over the above indicated makes. Apart from the above makes, any further equivalent make as approved by the Bank, can also be used with prior permission from the Bank and the consultant. Samples are to be approved by Bank and the Consultant if any.

COLOUR CODING: Color coding of wires to be followed strictly and all the DB boards to be named

RED - Phase, BLACK - Neutral, GREEN - Earth

WARRANTY OF ABOVE ITEMS to be specified

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

Gokul Road, Hubballi-580030

Internal Page 8 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

Certificate to be submitted by the contractor on completion of works

**Format of Installation Test Certificate**

( To be submitted by the contractor on completion of works)

- I This is to certify that work is carried out confirming to IE rules and code of practice.
- II Test report is under
- a Insulation resistance test
- |     |     |        |
|-----|-----|--------|
| R-N | ___ | M Ohms |
| Y-N | ___ | M Ohms |
| B-N | ___ | M Ohms |
- b Load test
- |             |             |            |
|-------------|-------------|------------|
| 5 A-1000 W  | power point | 15 minutes |
| 15 A-3000 W | power point | 15 minutes |
- c Earth resistance for each electrode
- |   |            |
|---|------------|
| 1 | ohm        |
| 2 | ohm        |
| 3 | ohm        |
| 4 | -N-E Volts |
- d Wiring continuity test
- e Earth continuity test
- f Certificate of makes of material used in the work
- g Circuit diagram
- h Certified that the electrification work has been carried out under the supervision of licensed electrical supervisor
- i Certified that the earthing plate / pipe has been verified and placed at correct depth confirming to IE rules.

Signature of Electrical Supervisor

Name:

License No.


Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 9 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

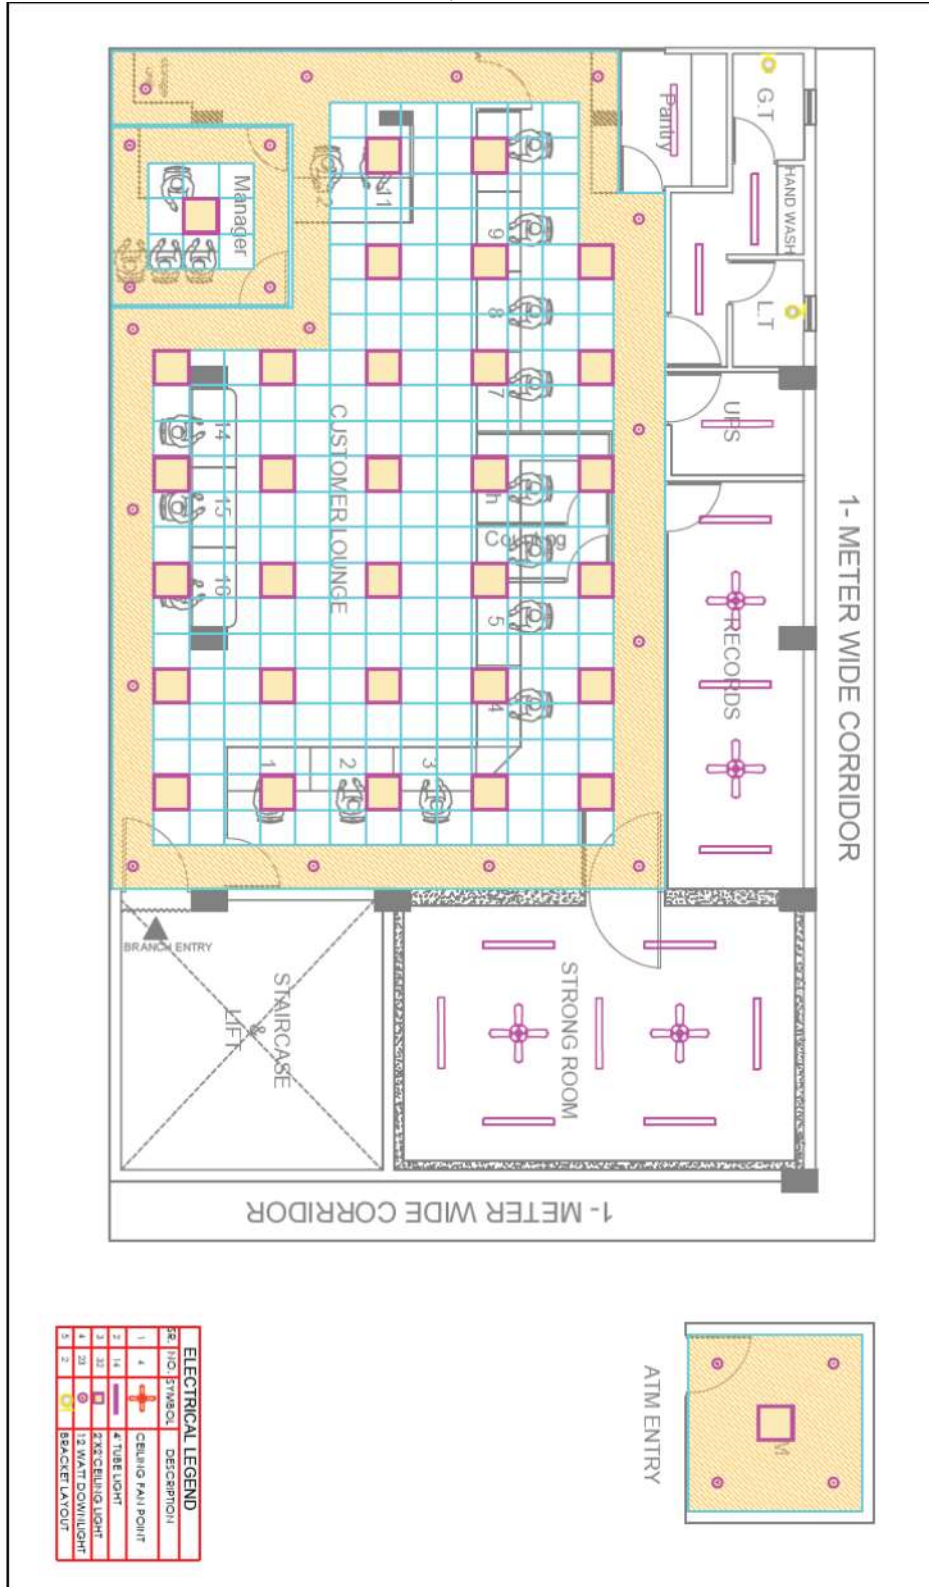

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Sl. No.	Description	Unit	Qty	Rate	Amount
	<b>Part A: Internal Electrical Work</b>				
1	Supply and fixing 12 way VTPNDB with 100 A MCCB Incoming and 63/40 A 3 P MCB for AC's and Lighting 12Nos. Branch AC-63/40A TPMCB - 2 Nos Raw Power & Single Phase - 40 A- 1 Nos Lighting - 40 A TPMCB - 1 Nos Branch UPS in put - 40 A - 2 Nos SPARE - 2 Nos	Set	1		
2	Supply and fixing 4 way TPNDDB with 63 A MCB 1 Nos 10 A SPMCB 12 Nos - Lighting DB with the following for Lighting DB: Incomer: 40A 4P MCB - 1 No Outgoings: 10 A SP MCB - 12 Nos (Lighting Circuits & Raw Power)	Set	1		
3	Supply and fixing 4 way TPNDDB with 63 A MCB 1 Nos 16/20 A SPMCB 12 Nos - AC DB & Raw Power with the following for AC DB & Raw Power: Incomer: 63A 4P MCB - 1 No Outgoings: 16/20 A SP MCB - 8 Nos (Raw Power/Single Phase AC ) Outgoings: 20/25 A TPMCB - 4 Nos (AC Circuits & Control )	Set	1		
4	Supply and fixing 12 way SPNDDB with 32 A MCB 1 Nos 10/20 A SPMCB 12 Nos - UPS DB with the following for UPS DB: Incomer: 32A DP MCB - 1 No Outgoings: 10/20 A SP MCB - 12 Nos (UPS out put Circuits )	Set	1		
5	Supply and fixing 32 A 4 P MCB with Enclosers for outdoor AC Unit	Nos	3		
6	Supply and fixing 20 A socket & 20A / 32 DP switch for AC Controls.	Nos	3		
7	Supply and fixing 40 A 2 P MCB with Enclosers for UPS input & output.( Ups Input-02 Nos, stablizer Input-01 Nos, Ups Out Put -01 Nos)	Nos	3		
8	<b>Heavy duty socket for UPS output:</b> Supplying and fixing of flush/ surface mounting type approved make IP 44 Category 32 amps 2 pin + E metal clad plug and socket distribution board ( Legrand Cat No 507863 or equivalent type other approved make) consisting of 32 Amps metal clad plug & socket with interconnection, blank plates,	Set	1		

Signature of Bidder with seal

Page 11 of 20

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	labelling etc all as per requirement for Branch UPS output supply.				
9	Supplying and fixing of 3C x 2.5 sq mm copper conductor PVC insulated and PVC round sheathed flexible cable of suitable length with 16 Amps 3 pin plug top at one end. This includes Supplying and fixing of flush / surface mounted, approved make modular type power point with 6/16 Amps socket, separate indicator, 16 Amps one way switch all mounted in a single front plate, switch box complete with interconnections and all accessories as per requirement for <b>strong room power supply</b> .	No	1		
10	Supplying and fixing of 3C x 2.5 sq mm copper conductor PVC insulated and PVC round sheathed flexible cable of suitable length with 6 Amps 3 pin plug top at one end. This includes Supplying and fixing surface / flush mounting type 6 amps Independent plug point using approved make modular type 6 amps switch with indicator, 6 amps multi pin International socket for compatibility with all types of pins, front plate, switch boxes and all other accessories as per requirement including necessary chipping work and making good of chipped portions for <b>strong room UPS Power supply</b> .	No	1		
11	<b>Point Wiring for Lights, fans and exhaust fan points:</b> Providing Point Wiring for Lights, fans and exhaust fan points using 1.5sq mm FRLSH insulated copper conductor wire for phase neutral and earth wires in 20 mm dia approved make ISI mark medium gauge rigid PVC conduit pipe run on the surface of wall, concealed type, with all accessories including approved make modular type switches and accessories, ceiling rose /Angle holders/Batten holders etc as per requirement complete with necessary chipping work and making good of chipped portions as per requirement. <b>This includes the wiring from lighting DB to the Switch boards using of (2x2.5 sq mm + 1x 1.5 sq mm ) FRLSH insulated copper conductor wires of approved make in 20/25 mm dia medium gauge rigid PVC conduit pipe of ISI mark Conduits are to run on surface of wall /concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement</b>				

Signature of Bidder with seal

Internal Page 12 of 20

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	Maximum 3no's of circuit running in single conduit pipe for lighting circuits				
	a) One light controled by single switch	Set	35		
	b) Two lights controled single switch	Set	18		
12	<b>Point Wiring for UPS Light points:</b> Providing Point Wiring for UPS Light points using 3runs of 1.5sq mm FRLSH insulated copper conductor wire for phase neutral and earth wires in 20 mm dia approved make ISI mark medium gauge rigid PVC conduit pipe run on the surface of wall, concealed type, with all accessories including approved make modular type switches and accessories, ceiling rose /Angle holders/Batten holders etc as per requirement complete with necessary chipping work and making good of chipped portions as per requirement. <b>This includes the wireing from lighting DB to the Switch boards using of (2x2.5 sq mm + 1x 1.5 sq mm ) FRLSH insulated copper conductor wires of approved make in 20/25 mm dia medium gauge rigid PVC conduit pipe of ISI mark Conduits are to run on surface of wall /concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement Maximum 3no's of circuit running in single conduit pipe for ups lighting circuits</b>	Set	20		
13	<b>Point Wiring for Wall mounted fan point:</b> - Providing Wall mounted fan point wiring with details same as given in item no 13 but, for providing point wiring to wall mounted fan points by providing 6 Amps 3/2 pin socket at outlet of point.	Nos	15		
14	<b>Point Wiring for Call bell point:</b> Supplying and providing call bell point using 1. 5 sq mm approved make FRLSH insulated copper conductor wires in 20 mm dia approved make ISI mark medium gauge rigid PVC conduit pipe run on the surface of wall/concealed type with all accessories, including approved modular type bell push, suitable type call bell complete with necessary chipping and making good of chipped portions as per requirement.	Set	1		
15	<b>Dependent 6 Amps Switch &amp; socket:</b> Supplying and fixing of surface / flush mounting type 6 amps dependent plug point using approved make modular type 6 amps switch with indicator, 6	Set	10		

Signature of Bidder with seal

Internal Page 13 of 20

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	amps multi pin socket, switch boxes, front plates and all other accessories as per requirement.			
16	<b>Independent 6 Amps Switch &amp; socket:</b> Supplying and fixing surface / flush mounting type 6 amps Independent plug point using approved make modular type 6 amps switch with indicator, 6 amps multi pin International socket for compatibility with all types of pins, front plate, switch boxes and all other accessories as per requirement including necessary chipping work and making good of chipped portions.	Set	18	
17	<b>6/16 Amps Switch &amp; socket:</b> Supplying and fixing of flush / surface mounted, approved make modular type power point with 6/16 Amps socket, separate indicator, 16 Amps one way switch all mounted in a single front plate, switch box complete with interconnections and all accessories as per requirement..	Set	10	
18	<b>Computer point :</b> Supplying and fixing approved make modular type power points having one 16 Amps switch, separate red colour indicator, 3 nos 6 Amps multi pin socket all fixed in one row complete with flush mounting type front plate, switch box, interconnection with 1.5 sq mm wires etc all as per requirement.	Set	21	
19	<b>AC Point :</b> Supplying and fixing of flush/ surface mounting type approved make 20 amps metal clad plug and socket distribution board with 16/20 Amps SP MCB ( Legrand Cat No 507811 or equivalent type other approved make) complete with all interconnections.	Set	3	
20	<b>AC Point :</b> Supplying and fixing of modular type approved make 40 Amps heavy duty socket complete with front plate, switch boxes and all other accessories as required..	Set	3	
<b>LIGHT, FAN &amp; EXHAUST FAN FIXTURE</b>				
21	<b>Wall Fan :</b> Supplying and fixing of approved make ( Orient//Almonard/ Crompton/Havells or equivalent type other approved make model to be approved by the Bank) 400 mm sweep metal blade (Bank approved colour blades) Wall mounting type fan with all accessories for banking Hall.	Nos	14	
22	<b>Wall Fan :</b> Supplying and fixing of approved make ( Orient//Almonard/ Crompton/Havells or equivalent type other approved make model to be approved by the Bank) 300 mm sweep , metal blade (Bank approved colour blades) Wall	Nos	1	

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

Gokul Road, Hubballi-580030

Internal Page 14 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	mounting type fan with all accessories for Cash room				
23	<b>Ceiling Fan</b> : Supplying and fixing of approved make ( Crompton 'Aura' / Orient - Twister Super, Havell's 'SS-390' or equivalent type other make model to be approved by the Bank )1200 mm sweep, Colour of Banks choice, ceiling fan includes modular type EME electronic fan regulator stepped type, noiseless, humming free and 12 mm dia M.S "S" hook for ceiling fans. Hook is to be provided in the RCC ceiling by chasing concrete and re-plastering with all other standard accessories, 3 core wire etc as per requirement	Set	4		
24	<b>Ceiling Fan</b> : Supplying and fixing of approved make ( Crompton 'Aura' / Orient - Twister Super, Havell's 'SS-390' or equivalent type other make model to be approved by the Bank )900 mm sweep, Colour of Banks choice, ceiling fan includes modular type EME electronic fan regulator stepped type, noiseless, humming free and 12 mm dia M.S "S" hook for ceiling fans. Hook is to be provided in the RCC ceiling by chasing concrete and re-plastering with all other standard accessories, 3 core wire etc as per requirement	Set	1		
25	<b>Exhaust Fan:</b> Supplying and fixing of Polar/Almonard/ RR make 300 mm sweep metal body, metal blade heavy duty window mounting exhaust fan using fixing hardwares, 3 core wire etc as per requirement in UPS room.	Set	1		
26	<b>Exhaust Fan:</b> Supplying and fixing of Polar/Almonard/ RR make 230 mm sweep metal body heavy duty window mounting exhaust fan using fixing hardwares, 3 core wire etc as per requirement in toilets.	Set	3		
27	<b>42 watts LED light</b> : Supplying and fixing of approved make 42 watts LED light fixture with flat panel, high brightness LED for glare free homogenous illumination, recess mounting ( Havell's Cat No VENUSNEOHE2X2PLR18-42WLED857MOD) or equivalent type Philips/ Wipro/ Crompton make (model to be approved by the Bank) by providing the three core wire from ceiling rose to light point complete with 42 watts driver and all fixing accessories required for all types of ceiling, grid ceiling, gyp board ceiling etc.	Set	32		

Signature of Bidder with seal

Internal Page 15 of 20

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

28	<b>18 watts LED light</b> : Supplying and fixing of approved make 18 watts round LED down light fixture for recess mounting ( Havell's Cat No INTEGRANEODLR18WLED857S/ or equivalent type Philips/ /Wipro/ Crompton make ( model to be approved by the Bank) by providing the three core wire from ceiling rose to light point complete with driver and all fixing accessories.	Set	23		
29	<b>LED Tube light</b> : Supplying and fixing of box type LED Tube light batten with lamp holders on both sides and detachable type Crystal Glass 20/18 Watts LED tube Light. ( Havells Cat No LHFYBWP1TBW020 + LHLDDAXEUL82018) or equivalent type of Philips/ Wipro/ Crompton complete with LED Tube light, box type housing and built in - driver.	Set	14		
30	Supplying and fixing approved make retrofit type 11 Watts LED lamp.	Nos	3		
<b>DISTRIBUTION AND MAIN CIRCUITS</b>					
31	Supplying and laying of (2x2.5 sq mm + 1x 1.5 sq mm ) FRLSH insulated copper conductor wires of approved make in 20/25 mm dia medium gauge rigid PVC conduit pipe of ISI mark Conduits are to run on surface of wall /concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement ( <b>lighting DB to power point</b> ) Maximum 3 circuit running in single conduit pipe and 3 no's of power point in one circuit. <b>Raw power and UPS power line shall be in separate conduits</b>	Mtr	165.00		
32	Supplying and laying of (2x2.5 sq mm + 1x 1.5 sq mm ) FRLSH insulated copper conductor wires of approved make in 20/25 mm dia medium gauge rigid PVC conduit pipe of ISI mark Conduits are to run on surface of wall /concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement ( <b>UPS DB to UPS power point</b> ) Maximum 3 circuit running in single conduit pipe and 3 no's of power point in one circuit. <b>Raw power and UPS power line shall be in separate conduits</b>	Mtr	160.00		

Signature of Bidder with seal

Internal Page 16 of 20

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

33	Supplying and laying of (2 x 4.0 sq mm + 1 x 2.5 sq mm ) FRLSH insulated copper conductor wires of approved make in 20 mm dia medium gauge rigid PVC conduit pipe of ISI mark. Conduits are to be run on the surface the of wall/concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement for single circuit running in single conduit pipe for <b>glow sign board light, split AC, etc.</b>	Mtr	75.00		
34	Supplying and laying of (4 x 4.0 sq mm + 2 x 2.5 sq mm) FRLSH insulated copper conductor wires of approved make in 20 mm dia medium gauge rigid PVC conduit pipe of ISI mark Conduits are to be run on the surface of wall/concealed type in the walls, floors or on the wooden interiors with all accessories using screws and plc. plugs, complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods as per requirement for <b>two circuits running in single conduit pipe for split AC circuits/ 3Phase AC, and Main panel to LDB,</b>	Mtr	180.00		
35	Supplying and laying of (2 x 6.0 + 1 x 4.0 sq mm) FRLSH insulated copper conductor wires of approved make in 20 mm dia ISI mark, medium gauge rigid PVC conduit pipe . Conduits are to be run on the surface of the wall/concealed type in the walls, floors or on the wooden interiors with all accessories using screws and plc. plugs, complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement for <b>main UPS to UPS DB</b>	Mtr	25.00		
36	Supplying and laying of (4 x 6.0 + 2 x 4.0 sq mm) FRLSH insulated copper conductor wires of approved make in 25 mm dia ISI mark, medium gauge rigid PVC conduit pipe . Conduits are to be run on the surface of the wall/concealed type with all accessories complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement for <b>UPS 1and UPS 2 input SOCKET</b>	Mtr	20.00		

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

Gokul Road, Hubballi-580030

Internal Page 17 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

37	Supplying and laying of (2 x 6.0 + 1 x 4.0 sq mm) FRLSH insulated copper conductor wires in 19/20 mm dia heavy duty PVC flexible conduit pipe <b>UPS 1 and UPS 2 input supply &amp; Output Socket.</b>	Mtr	10.00		
39	Supplying and laying of (2 x 10.0 + 1 x 4.0 sq mm) PVC insulated copper conductor wires of approved make in 25 mm dia ISI mark, medium gauge rigid PVC conduit pipe . Conduits are to be run on the surface of the wall/concealed type in the walls, floors or on the wooden interiors with all accessories using screws and plc. plugs, complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement. for <b>DG to Main panel board</b>	Mtr	15.00		
40	Supplying and laying of (4 x 10.0 sq mm) PVC insulated copper conductor wires of approved make in 25 mm dia ISI mark, medium gauge rigid PVC conduit pipe . Conduits are to be run on the surface of the wall/concealed type in the walls, floors or on the wooden interiors with all accessories using screws and plc. plugs, complete with necessary chipping and making good of chipped portions or by providing slotted cross channels with suspended threaded rods for running wiring conduits as per requirement for <b>Meter board to Main panel board</b>	Mtr	45.00		
	<b>EARTHING</b>				
41	<b>Plate Earthing:</b> supplying and providing Copper plate earthing with 300 mm x 300 mm x 3.0 mm Copper Earthing plate as per IS 3043 complete with earth work excavation, installation of earth electrode, providing mixture of salt and charcoal to the full length of the electrode, brick work masonry, inspection chamber of 300 mm x 300 mm clear dimension, funnel with wire mesh, C.I or RCC cover to the chamber complete with all requirements. For <b>Branch UPS earthing</b>	Set	1		
42	<b>Pipe Earthing:</b> supplying and providing pipe earthing as per IS 3043 using 40 mm dia 2.5 mtr long, class 'B' GI pipe Earth electrode with staggered holes, complete with earth work excavation, installation of earth electrode, providing mixture of salt and charcoal to the full length of the electrode, brick work masonry, inspection chamber of 300 mm x 300 mm clear dimension, funnel with wire mesh, C.I or RCC	Set	2		

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,

T: 08362-2239432/433 /434

Gokul Road, Hubballi-580030

Internal Page 18 of 20

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	cover to the chamber complete with all requirements, one for Branch panel board and ATM UPS earthing.			
43	<b>Earth bus bar:</b> Supplying and fixing of earth bus (link) of size 3/4" x 1/8" x 10" copper strip mounted on porcelain insulator supports, provided with 6 mm holes, brass hex head bolt nut and washers for Branch UPS output.	Set	2	
44	<b>Earthing wire:</b> Supplying fixing and laying of 10 SWG bare copper earthing conductor in 20/25 mm dia ISI mark, medium gauge Grey colour rigid PVC conduit pipe run on the surface of wall / including earthwork excavation and backfilling with all accessories	Mtr	90.00	
	<b>TELEPHONE POINT</b>			
45	Supplying and fixing RJ 11, modular type telephone point having one jack in one box with all accessories	Set	1	
46	Supplying and fixing RJ 11, modular type telephone point having two jack in one box with all accessories	Set	10	
47	Supplying and fixing of 10 pair Krone connector telephone junction box with sheet steel enclosure including, labelling of wires with ferrules and termination of telephone wires into the Krone connectors .	Set	1	
48	Supplying fixing and laying 2 pair, 0.5 mm dia PVC insulated, copper conductor, telephone wire of approved make This includes 20/25 mm dia ISI mark, medium gauge Grey colour rigid PVC conduit pipe run on the surface of wall/ concealed type in the walls, floors or on the wooden interiors with all accessories using screws and pace plugs, complete with necessary chipping and making good of chipped portions or by providing slotted cross channel with suspended threaded rods as per requirement as per requirement for running telephone wire.	Mtr	210.00	
49	Providing and fixing of Safety accessories as follows:- 1) F.R. Rubber MAT - 6ft X 3ft - 01 no. Quality and make of the above has to be approved by consultant. Mandatory to be provided	Set	1	
50	<b>Electrical Line Diagram:</b> Providing as built Key single line diagram certified by Electrical Engineer showing meter board, panel board, main control switch, sub DB's, UPS DB's, UPS, panel and sub DB circuits with all the components such as lights,	Set	1	

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

Internal Page 19 of 20

T: 08362-2239432/433 /434

E:pecohub@canarabank.com

**ಸಿಂಡಿಕೇಟ್ ಸಿಂಡಿಕೇಟ್ Syndicate**

NIT Ref. COHUB: GA: 007: DPJ:1425: 25-26 dated 25.07.2025

	fans, power points, computer point, earthing pits etc, no of components per circuit, load per circuit with all details such as rating of all components, cable sizes etc.				
	<b>Total Amount Ex GST</b>				

Signature of Bidder with seal

Premises & Estate Section,  
Circle Office Hubballi  
Centrum Building,  
Gokul Road, Hubballi-580030

T: 08362-2239432/433 /434

Internal Page 20 of 20

E:pecohub@canarabank.com